


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED

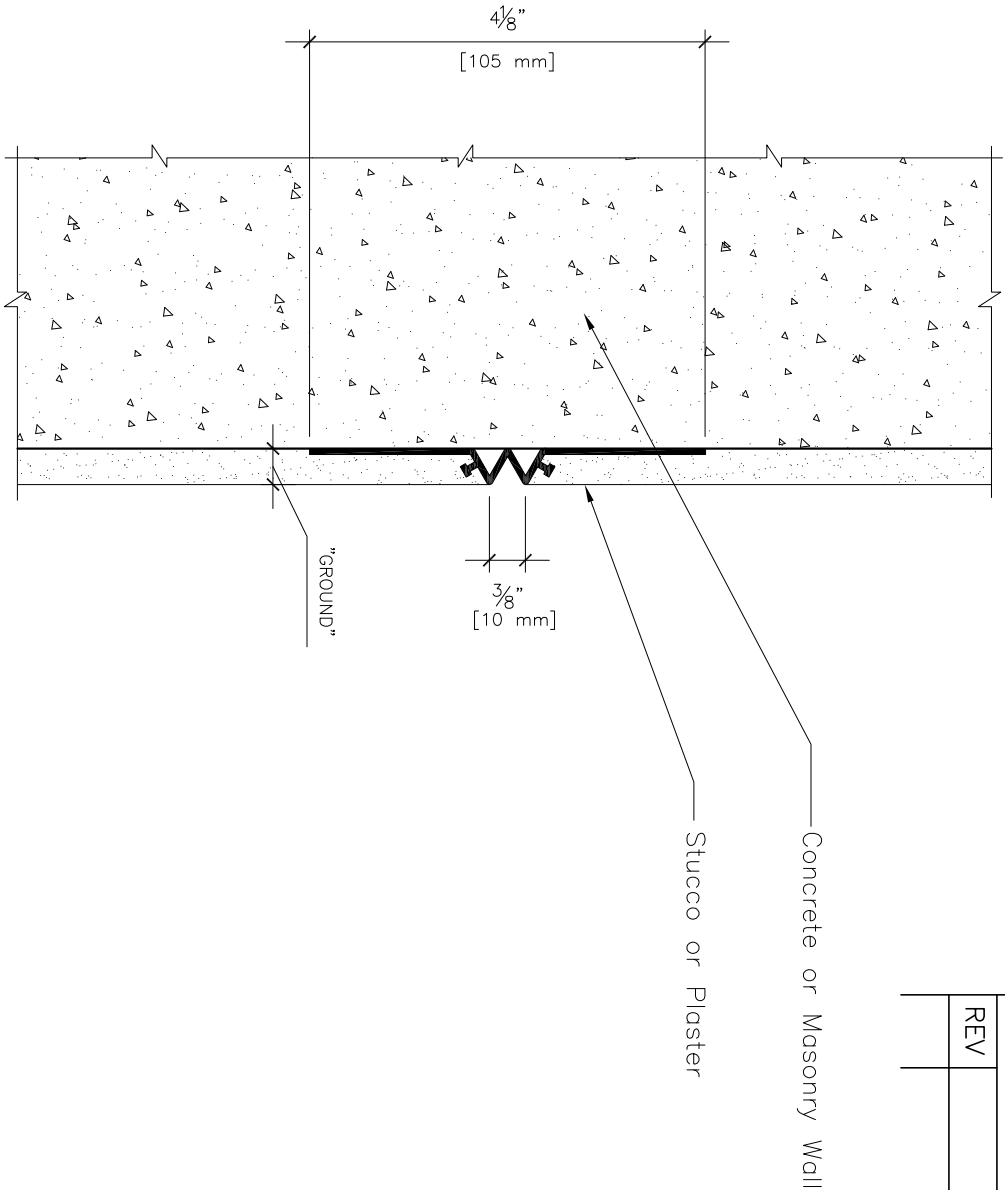

# “V” Control Joint with 4 1/8 inch perforated flanges for Stucco and Plaster

SCALE: 6” = 1’-0”

NOTES:

1. Typical installation shown.
2. Actual installation shall meet all local building codes and ASTM standards.
3. All butt joints, intersections, ends and corners shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components “Ultra Tech” (PC-ULTW).

Product Submittal	Product Number	Dimension “GROUND”
	2038	3/8” [10 mm]
	2050	1/2” [13 mm]
	2058	5/8” [16 mm]
	2075	3/4” [19 mm]
	2078	7/8” [22 mm]
	2100	1” [25 mm]

	NAME	DATE	PLASTIC COMPONENTS, Inc. 9051 NW 97th Terrace ~ Miami, FL 33178 800-327-7077 ~ <a href="http://www.plasticcomponents.com">www.plasticcomponents.com</a>		
DRAWN	JKW	12/6/2011			
CHECKED					
ENG APPR					
MGR APPR			TITLE “V” Control Joint with 4 1/8 inch perforated flanges		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES ANGLES ±X.X° 2 PL ±X.XX 3 PL ±X.XXX			SIZE	DWG NO	REV
			A	“V” Control Joint	
			FILENAME:	V-Control Joint-Stucco.dwg	
SCALE:			WEIGHT:	SHEET 1 OF 1	