



### For Floor Line Applications and Wall-with-Gable Wall Intersections

#### Moisture Management at its Best!

Plastic Components' **SBZ-50** 'Z' Flashing is designed for use as a drip edge at the floor line with a variety of 1/2" sheathing materials. It can also be used at the intersection of a wall with a gable wall.

- Allows moisture to migrate down, shedding away from the wall and foundation.
- Rustproof, non-conductive... unaffected by moisture, salt or chemicals
- Pre-drilled nail holes
- Easy to handle


### For Floor Line Applications & Intersecting Walls

Product Number	Description 1/2" 'Z' Flashing	Pieces per Box
<b>SBZ-50</b>	w/ drip edge for 1/2" (13 mm) board	30
<b>SBZ-58</b>	w/ drip edge for 5/8" (16 mm) board	30
<b>SBZ-75</b>	w/ drip edge for 3/4" (19 mm) board	30
<b>SBZ-78</b>	w/ drip edge for 7/8" (22 mm) board	30

Available in 10' Lengths (3 m)

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-TechT (PC-ULTW).

Plastic Components' exterior trims are UV resistant, and manufactured of high-impact resistant, lead-free PVC compounds that conform to ASTM standards D1784 and C1063 (for exterior stucco, one coat, DEFS and EIFS applications), D1784 (for exterior stucco), and D3678 and C1047 (for interior drywall).

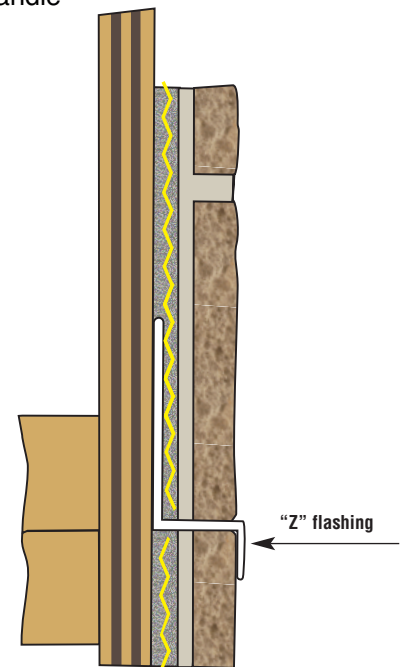

Distributed by

