


Stucco and Plaster

Section: 09200


Casing Bead for Arches

Product Number	Ground	Dimensions/Descriptions	Pieces Per Box
1025A	1/4" (6 mm)	Arched casing bead, 1-3/4" (44 mm) perforated flange.	75
1038A	3/8" (10 mm)		75
1050A	1/2" (13 mm)		75
1058A	5/8" (16 mm)		75
1075A	3/4" (19 mm)		75
1078A	7/8" (22 mm)		75
1100-0-A	1" (25 mm)		50
1125-0-A	1-1/4" (32 mm)		50
1150-0-A	1-1/2" (38 mm)		50

10' (3 m) Lengths

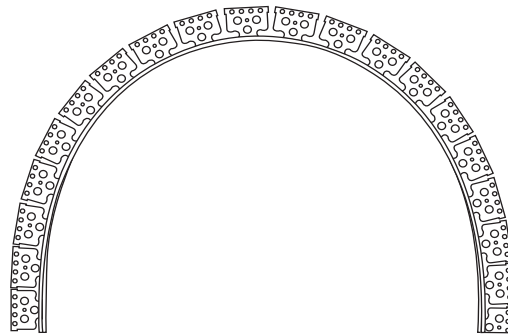

Patent pending

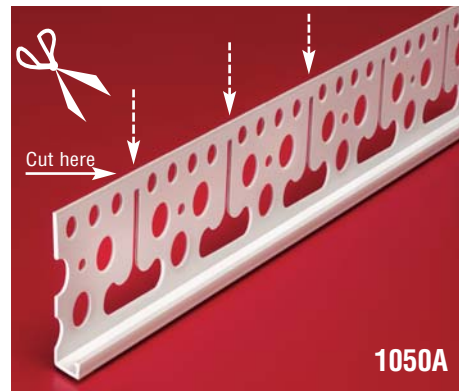

Application:

For use in any area where an arched detail has been specified. This stucco casing bead can be converted into an arched casing bead by simply cutting the pre-slotted flange.

Specification:

Arched Casing Bead shall be Plastic Components, Inc. #_____. All exterior accessories shall conform to ASTM standards D1784, C1063 and D4216. All products shall be third party tested to meet ASTM standard D4216 and be Canadian Code Compliant. They shall be used where specified by the architect and installed per industry standards.

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).