

Stucco and Plaster



Section: 09200

“M” Control Joint

Product Number	Ground*	Dimensions/Descriptions	Pieces Per Box
2025	1/4" (6 mm)	“M” Control Joint with removable tape perforated flanges.	50
2138XS	3/8" (10 mm)		50
2150X	1/2" (13 mm)	“M” Control Joint 1/2" (13 mm) with removable tape. Larger perforated flanges with two rows of holes.	40
2158X	5/8" (16 mm)		40
2175X	3/4" (19 mm)		30
2178X	7/8" (22 mm)		30
2100X	1" (25 mm)		20

10' (3 m) Lengths



* For Stucco Trim, Ground dimension is measured from the back side of the flange to the top side of the trim piece.

Application:

This popular “M” design not only provides control of substrate movement but also gives the appearance of a narrow reveal. Removable tape keeps the “V” clean during installation.

Specification:

“M” Control Joint will be Plastic Components, Inc. #_____. All exterior accessories shall conform to ASTM standards D1784, C1063 and D4216. All products shall be third party tested to meet ASTM standard D4216 and be Canadian Code Compliant. They shall be used where specified by the architect and installed per industry standards.

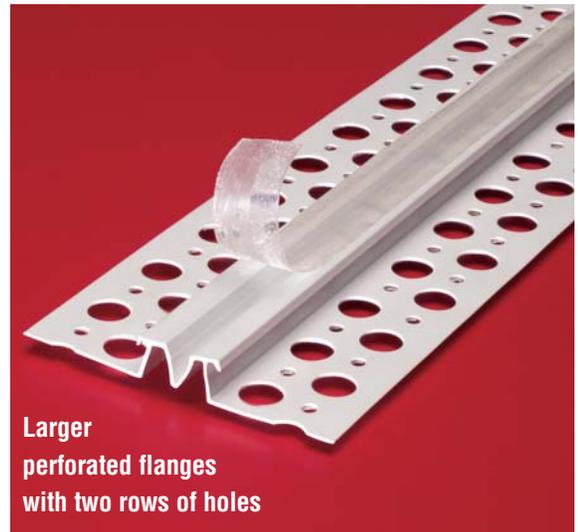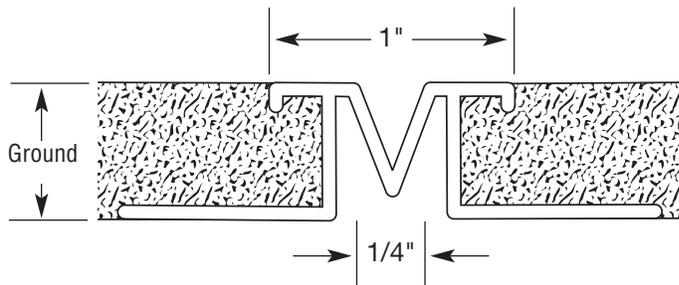

Larger perforated flanges with two rows of holes



"F" Series also available. Add prefix "F" to the product number. e.g. Product F2150X

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).



800.327.7077 ■ Fax 305.887.2452
www.plasticcomponents.com