



NEW!

Plastic Components offers **WHITE, GRAY** or **TAN** foundation sill screeds, casing beads and drip edges for stone veneer applications.

The colorant runs throughout the trim so there's no chipping or loss of color. All are available in 10 ft (3 m) lengths and conform to ASTM standards D1784, C1063 and D4216.

Eliminate painting. Look great with a rustproof job that saves time & money!

**Permanent, molded-in color
NO peeling, chipping
or color loss!**



Termination Bead


Colored termination beads form a finished edge between stone veneer and other materials such as vinyl or cementitious siding, stucco, etc.

Product Number	Description Colored Termination Bead	Ground	Pieces in Box
1050	White with 1-1/4" (32 mm) perforated flange	1/2" (13 mm)	75
1058		5/8" (16 mm)	75
1075		3/4" (19 mm)	75
1078		7/8" (22 mm)	50
1100		1" (25 mm)	50
1050TAN	Tan with 1-1/4" (32 mm) perforated flange	1/2" (13 mm)	75
1058TAN		5/8" (16 mm)	75
1075TAN		3/4" (19 mm)	75
1078TAN		7/8" (22 mm)	50
1100TAN		1" (25 mm)	50
1050GRAY	Gray with 1-1/4" (32 mm) perforated flange	1/2" (13 mm)	75
1058GRAY		5/8" (16 mm)	75
1075GRAY		3/4" (19 mm)	75
1078GRAY		7/8" (22 mm)	50
1100GRAY		1" (25 mm)	50

Add suffix "WP" to order with weep holes. Example: 1050TANWP

Foundation Weep Screeds

Install our foundation weep screeds at the plate line or stem wall.

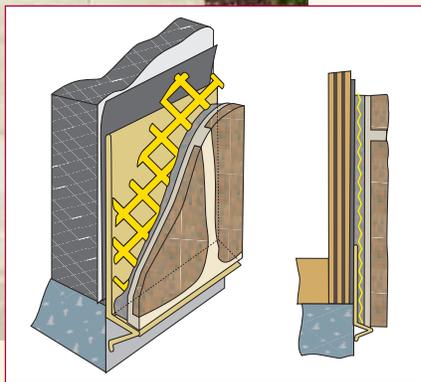

They provide a stop for stone veneer and allow moisture to migrate down and away from the wall.

Product Number	Description FHA Weep Screeds	Ground	Pieces in Box
632-50	White weep screed with 3-1/2" (89 mm) flange for framing applications	1/2" (13 mm)	35
632-58		5/8" (16 mm)	35
632-75		3/4" (19 mm)	35
632-78		7/8" (22 mm)	35
632-100		1" (25 mm)	25
632-50TAN	Tan weep screed with 3-1/2" (89 mm) flange for framing applications	1/2" (13 mm)	35
632-58TAN		5/8" (16 mm)	35
632-75TAN		3/4" (19 mm)	35
632-78TAN		7/8" (22 mm)	35
632-100TAN		1" (25 mm)	25
632-50GRAY	Gray weep screed with 3-1/2" (89 mm) flange for framing applications	1/2" (13 mm)	35
632-58GRAY		5/8" (16 mm)	35
632-75GRAY		3/4" (19 mm)	35
632-78GRAY		7/8" (22 mm)	35
632-100GRAY		1" (25 mm)	25



Note All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant such as Plastic Components' Ultra-Tech™ (PC-ULTW).



Product Number	Description 2" Flange	Board Size	Pieces in Box	
SB-50	White Drip Edge with 2" (51 mm) back flange	1/2" (13 mm)	100	
SB-58		5/8" (16 mm)	100	
SB-75		3/4" (19 mm)	100	
SB-1		1" (25 mm)	75	
SB-15		1-1/2" (38 mm)	60	
SB-2		2" (51 mm)	50	
SB-3		3" (76 mm)	30	
SB-4		4" (102 mm)	25	
SB-50TAN		Tan Drip Edge with 2" (51 mm) back flange	1/2" (13 mm)	100
SB-58TAN			5/8" (16 mm)	100
SB-75TAN	3/4" (19 mm)		100	
SB-1TAN	1" (25 mm)		75	
SB-15TAN	1-1/2" (38 mm)		60	
SB-2TAN	2" (51 mm)		50	
SB-3TAN	3" (76 mm)		30	
SB-4TAN	4" (102 mm)		25	
SB-50GRAY	Gray Drip Edge with 2" (51 mm) back flange	1/2" (13 mm)	100	
SB-58GRAY		5/8" (16 mm)	100	
SB-75GRAY		3/4" (19 mm)	100	
SB-1GRAY		1" (25 mm)	75	
SB-15GRAY		1-1/2" (38 mm)	60	
SB-2GRAY		2" (51 mm)	50	
SB-3GRAY		3" (76 mm)	30	
SB-4GRAY		4" (102 mm)	25	

**Permanent, Molded-in Color –
NO Peeling, Chipping or Color Loss!**


Eliminates Painting • Looks Great



Over Window/Door Drip Edges

Our drip edges are *the PVC trims* to choose for extreme moisture conditions. Designed for use over window or door openings, they have sloped front edges that move moisture out and away from the wall assembly.

The SB-EMT series has a 3" back flange. The flange on the SB series drip edges is 2" tall. (see charts for details)

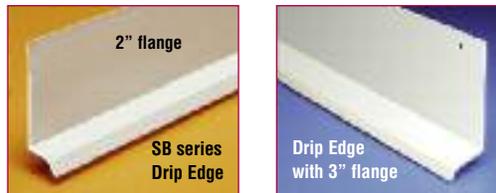

Product Number	Description 3" Flange	Ground	Pieces in Box
SB-EMT75	White STARTER TRAC™ with 3" (76 mm) back flange	3/4" (19 mm)	30
SB-EMT1		1" (25 mm)	30
SB-EMT15		1-1/2" (38 mm)	30
SB-EMT2		2" (51 mm)	30
SB-EMT75TAN	Tan STARTER TRAC™ with 3" (76 mm) back flange	3/4" (19 mm)	30
SB-EMT1TAN		1" (25 mm)	30
SB-EMT15TAN		1-1/2" (38 mm)	30
SB-EMT2TAN		2" (51 mm)	30
SB-EMT75GRAY	Gray STARTER TRAC™ with 3" (76 mm) back flange	3/4" (19 mm)	30
SB-EMT1GRAY		1" (25 mm)	30
SB-EMT15GRAY		1-1/2" (38 mm)	30
SB-EMT2GRAY		2" (51 mm)	30



Note All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant such as Plastic Components' Ultra-Tech™ (PC-ULTW).

Product Number	Ultra-Lath® Plus Plastic Lath	Packaging	Qty per Pallet
PDM2796-25	Sheets 27" x 96" (686 mm x 2.4 m)	10 sheets (180 sq. ft.) per bundle	20 bundles (3,600 sq. ft.) per pallet
PDM2796PB-25	Paper-backed Sheets 27" x 96" (686 mm x 2.4 m)	10 sheets (180 sq. ft.) per bundle	20 bundles (3,600 sq. ft.) per pallet
Backed with asphalt impregnated Type 1, grade D style 2 paper w/ standard offset			
PDMR-25	Rolls 27" x 75' roll (686 mm x 22.9 m)	168 sq. ft. per roll	18 rolls per pallet/ 3024 sq. ft per pallet
PDM3-25	Strip-Lath™ strips 3" (76 mm)	Length 96" (2,438 mm)	50
PDM4-25			50
PDM6-25			50
PDM8-25			50

Ultra-Lath® Plus Plastic Lath

For exterior or interior vertical applications over code-approved substrates (non-rated assemblies).

Non-rusting Ultra-Lath Plus is **1/4" self-furred** for exceptional keying. It is impervious to sand and the harsh chemicals found in portland cement-based stucco.

Available in sheets (*with or without paper backing*), and in rolls and strips.



Distributed by