

Stucco and Plaster

45 YEARS
PLASTIC PC
COMPONENTS


Section: 09200

Medium Flange Casing Bead

Product Number	Ground	Dimensions/Descriptions	Pieces Per Box
WF1050	1/2" (13 mm)	Medium flange casing bead, 2-1/4" (57 mm) perforated flange.	75
WF1058	5/8" (16 mm)		75
WF1075	3/4" (19 mm)		75
WF1078	7/8" (22 mm)		75

10' (3 m) Lengths

Add suffix "WP" to order with weep holes. Example: WF1050WP

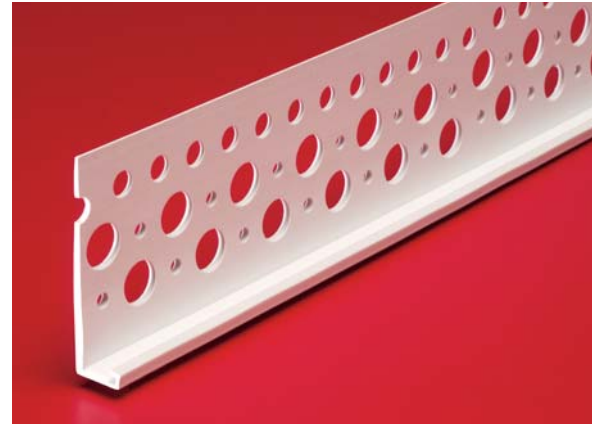


Application:

Use where an standard flange is required at a termination point.

Specification:

Medium Flange Casing Bead shall be Plastic Components, Inc. #_____. All exterior accessories shall conform to ASTM standards D1784, C1063 and D4216. All products shall be third party tested to meet ASTM standard D4216 and be Canadian Code Compliant. They shall be used where specified by the architect and installed per industry standards.

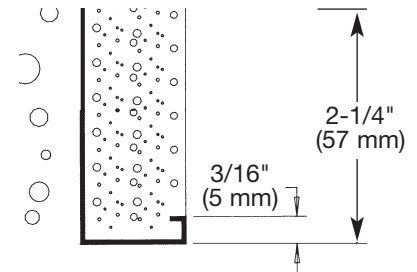

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-TechTM (PC-ULTW).