

Direct Applied Finishes

45 YEARS
PLASTIC PC
COMPONENTS

Section: 07240


"M" Control Joint

Product Number	Dimension A	Foam Thickness	Pieces Per Box
2250	1/2" (13 mm)	1/2" (13 mm)	25
2258	5/8" (16 mm)	5/8" (16 mm)	20

10' (3 m) Lengths

Application:

Designed for either vertical or horizontal application. Sheathing board slides in between nailing flange and perforated "wings". "Wings" have stops to ensure a clean, straight line during application of ground coat and finish. Perforations assure positive bond of ground coat to substrate.

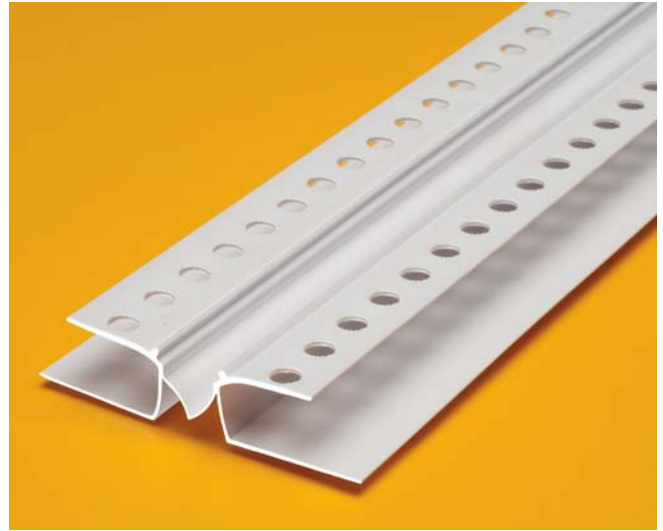

Specification:

"M" Control Joint will be Plastic Components, Inc. #_____. All exterior accessories shall conform to ASTM standards D1784, C1063 and D4216. All products shall be third party tested to meet ASTM standard D4216 and be Canadian Code Compliant. They shall be used where specified by the architect and installed per industry standards.

