

Direct Applied Finishes

45 YEARS
PLASTIC PC
COMPONENTS

Section: 07240

Transitional Floor Line Bead

| Product Number | Dimensions/Descriptions | Pieces Per Box |
|----------------|--|----------------|
| 1623 | For 5/8" (16 mm) board. Upper flange is 2-1/2" (64 mm). Bottom flange is 3" (76 mm). | 15 |

10' (3 m) Lengths

Application:


Transitional Floor Line Bead for 5/8" board was designed to protect the bottom board edge from moisture.

Specification:

Transitional Floor Line Bead will be Plastic Components, Inc. #_____. All exterior accessories shall conform to ASTM standards D1784, C1063 and D4216. All products shall be third party tested to meet ASTM standard D4216 and be Canadian Code Compliant. They shall be used where specified by the architect and installed per industry standards.



1623 Transitional Floor Line Bead can be used with Plastic Components Casing Beads eg. #CB-58-16

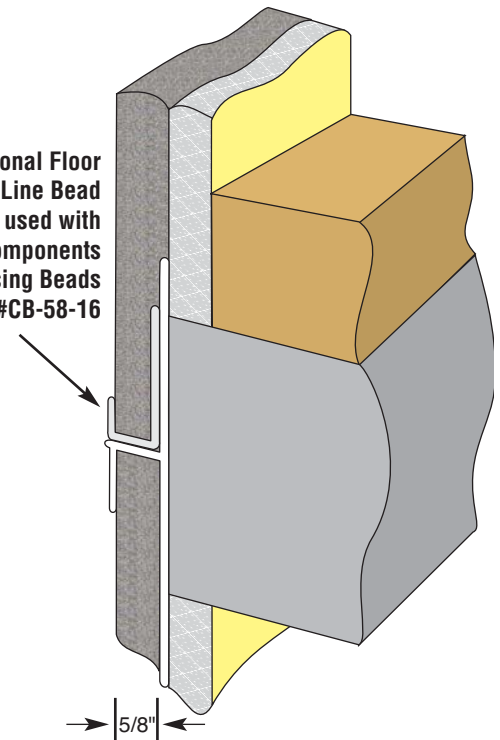

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.