

# Exterior Insulated Finishes

45 YEARS  
PLASTIC PC  
COMPONENTS


Section: 07240

## Surface Mounted Vent 3", 4" and 6" wide vents

Product Number	Vent Area	Free Air Flow per linear ft.	Pieces Per Box
SMV3	3" (76 mm)	15 sq. inches (9,678 sq. mm)	35
SMV4	4" (102 mm)	16 sq. inches (10,323 sq. mm)	35
SMV6	6" (152 mm)	20 sq. inches (12,904 sq. mm)	30

10' (3 m) Lengths – Connector clips included

1/8" (3 mm) ground. For all applications except stucco.

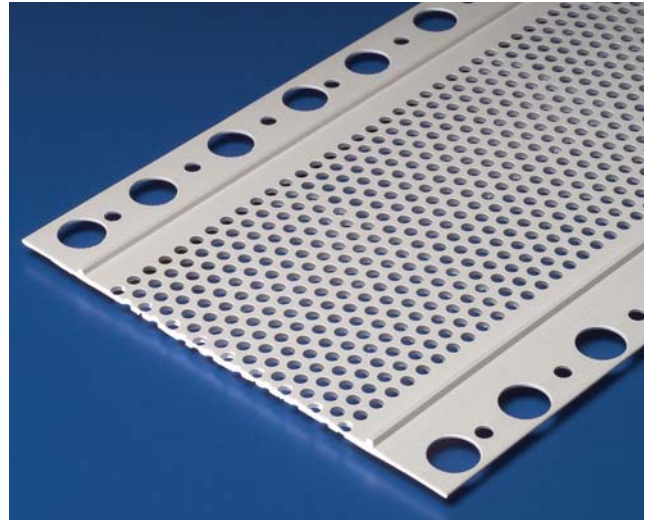

### Application:

A surface mounted vent suitable for all applications, *except stucco*. SMV3 installs easily on all sheathing products with either spray adhesives, or screws. For foam applications, a non-solvent base spray adhesive or a 3/4" (19 mm) pin-tac is recommended for attachment. All flanges must be base coated and covered with mesh per system manufacturer.

### Specification:

Surface Mounted Vent will be Plastic Components, Inc. #\_\_\_\_\_. All exterior accessories shall conform to ASTM standards D1784, C1063 and D4216. All products shall be third party tested to meet ASTM standard D4216 and be Canadian Code Compliant. They shall be used where specified by the architect and installed per industry standards.



The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.