



Plastic Components' **Ultra-Lath®** plastic lath is the labor-saving, non-rusting alternative to metal laths.

Safe and easy to use, and unaffected by salt, moisture and chemicals, heavy-duty Ultra-Lath is self-furred for positive keying, and compatible with all cement-based products.

Uses

- Continuous reinforcement for stucco used on vertical wall applications
- Underlayment for tile
- Hardscapes, fresh and salt-water pools, and fountains



Available in rolls, sheets, and strips

Sizes

In addition to 27" x 96" sheets and 27" x 100' rolls, Ultra-Lath is also available in **Strip-Lath®** strips.




Strip-Lath reinforces stress points at window/door openings, and provides a bridge between dissimilar materials. 96" long x 3", 4", 6" or 8" widths.

Perfect for stucco applications on vertical walls

- Lower installed cost
- Light weight
- Cuts with a utility knife
- Easy to handle
- Easy to shape, won't crimp or kink
- Non-dimensional
- No trowel drag
- Long, outdoor life – unaffected by sand and chemicals in cementitious wall coatings

Note: Not for use on soffits or open framing.

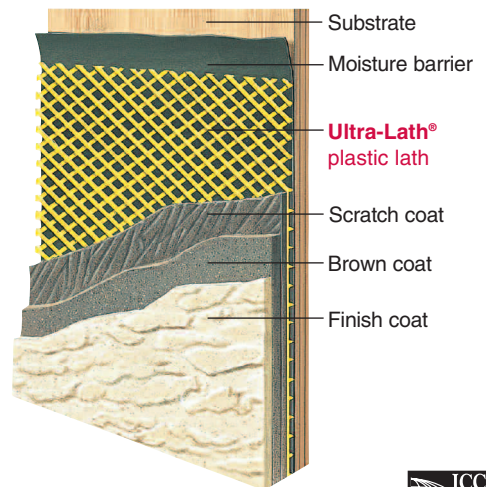

For best results use Plastic Components' PVC trims with all Ultra-Lath applications.



Report #94182