

CI/EIFS/Hard Coat

Section: 07240

EIFS "V" Control Joint

| Product Number | Finish Thickness | Pieces Per Box |
|----------------|------------------|----------------|
| 22027-16 | 1/16" (2 mm) | 50 |
| 22027-25 | 1/4" (6 mm) | 35 |
| 22027-38 | 3/8" (10 mm) | 25 |



10' (3 m) Lengths

Application:


To relieve stress caused by expansion and contraction within the system. This PVC deep groove "V" control joint is the most economical answer. Control joint should be placed at 144 sq. ft. (13.5 sq. meters) intervals. Excellent paint adhesion.

Specification:

Control Joint will be Plastic Components, Inc. #_____. All exterior accessories shall meet ASTM standards D1784, C1063, C1861 and D4216, shall be third party tested and Canadian Code compliant. They shall be used where specified by the design authority and installed per industry standards.

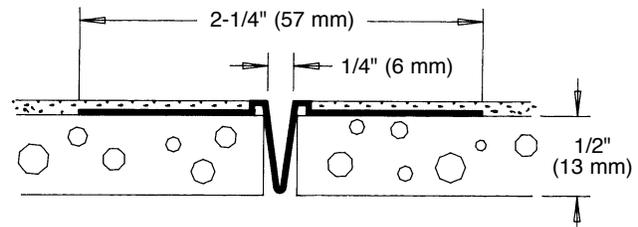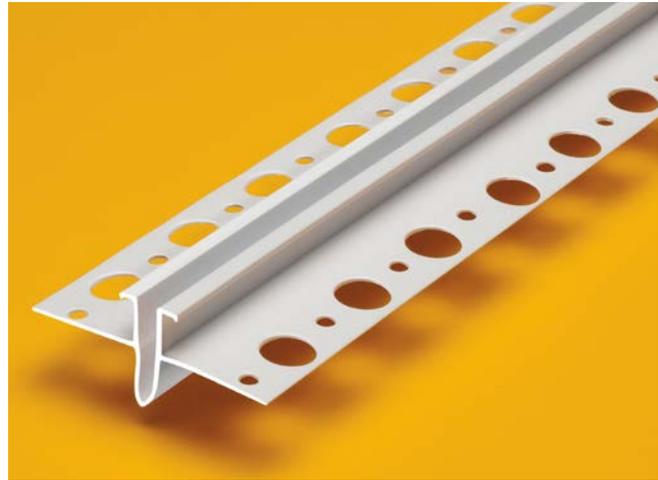

22027-16

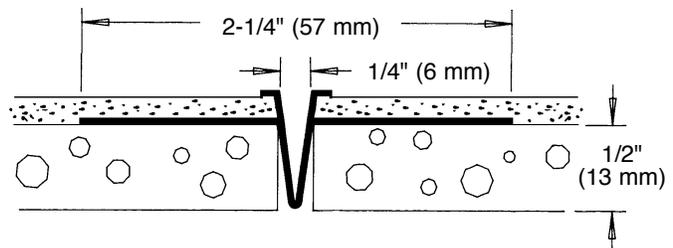

22027-25

22027-38

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

800.327.7077 ■ Fax 305.887.2452
www.plasticcomponents.com