

Stucco and Plaster

Section: 09200


Standard Flange Casing Bead (Weeped or Unweeped)

Product Number	Ground	Dimensions/Descriptions	Pieces per Box
1025	1/4" (6 mm)	Standard flange casing bead, 1-3/4" (44 mm) perforated flange.	75
1038	3/8" (10 mm)		75
1050	1/2" (13 mm)		75
1058	5/8" (16 mm)		75
1075	3/4" (19 mm)		75
1078	7/8" (22 mm)		75

10' (3 m) Lengths

Add suffix "WP" to order with weep holes.

Example: 1050WP
1/4" cannot be weeped.


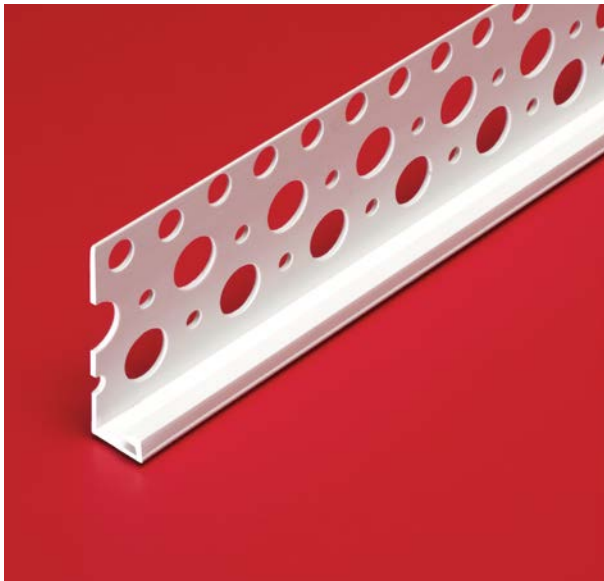


Application:

Use at areas where stucco terminates at foundations, windows, doors or any other termination point. Will not rust or dent.

Specification:

Standard Flange Casing Bead shall be Plastic Components Inc. # _____. All exterior accessories shall be of PVC material conforming to ASTM standards D1784, C1063, C1861 and D4216. They shall be used where specified by the design authority and installed per industry standards.

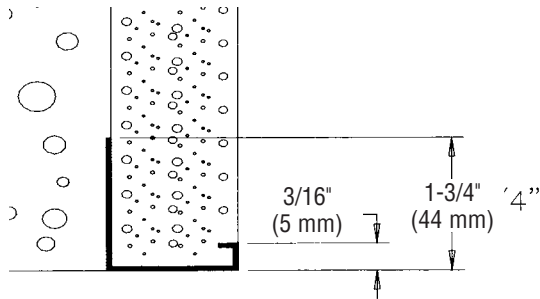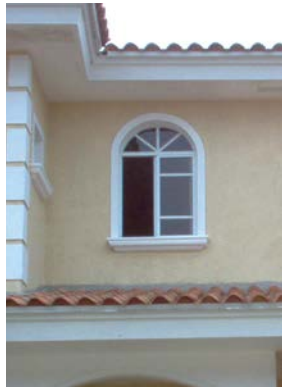

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).



305.885.0561 ■ 800.327.7077
www.plasticcomponents.com