
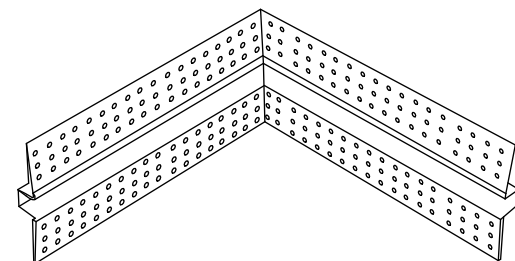
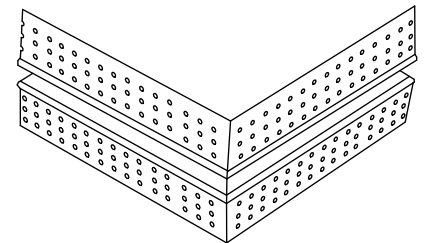

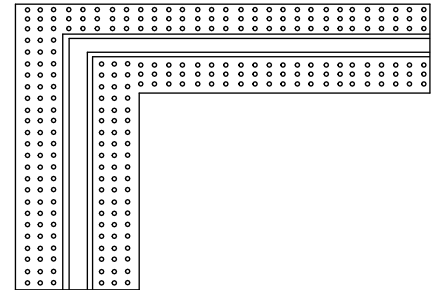
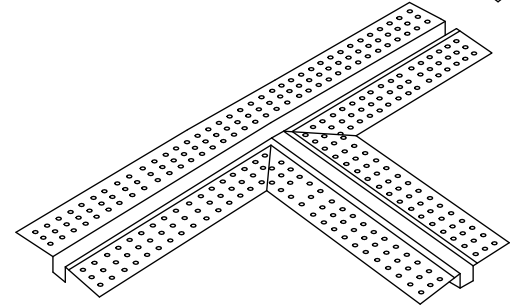


DRYWALL REVEAL INTERSECTION

| PRODUCT NUMBER | DIMENSION A | DIMENSION B | PIECES PER BOX |
|----------------|-------------|-------------|----------------|
| 225 | 1/2" | 1/2" MIN. | 25 |
| 226 | 1" | 1/2" MIN. | 25 |
| 227 | 3/4" | 1/2" MIN. | 25 |
| 228 | 3/8" | 1/2" MIN. | 25 |
| 229 | 5/8" | 1/2" MIN. | 25 |
| 235 | 1-1/2" | 1/2" MIN. | 25 |
| 236 | 2" | 1/2" MIN. | 25 |
| 237 | 3" | 1/2" MIN. | 25 |

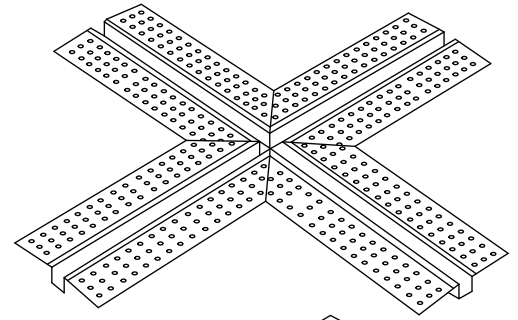

ORDERING EXAMPLE: 225C FOR CROSS, 225T FOR "T" 225A FOR ANGLE, 225IC FOR INSIDE CORNER, 225OC FOR OUTSIDE CORNER, 225EC FOR END CLOSURE.

APPLICATION: EIFS REVEAL INTERSECTIONS
 THESE FACTORY THERMALLY WELDED, SURFACE MOUNTED INTERSECTIONS ELIMINATE THE COSTLY AND TIME CONSUMING NEED TO FIELD CUT INTERSECTIONS.

SPECIFICATION:
 DRYWALL REVEAL INTERSECTION SHALL BE PLASTIC COMPONENTS, INC. #_____. ALL INTERSECTIONS SHALL BE FACTORY FABRICATED AND CONFORM TO ASTM STANDARDS D1784-97 AND C1063. ALL PRODUCTS SHALL BE THIRD PARTY TESTED TO MEET ASTM STANDARD D4216-99 AND BE CANADIAN CODE COMPLIANT. THEY SHALL BE USED WHERE SPECIFIED BY THE ARCHITECT AND INSTALLED PER INDUSTRY STANDARDS.