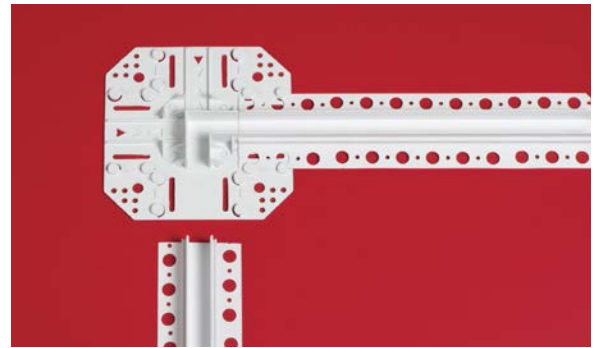


Stucco and Plaster

Section: 09200

ULTRA-TRAC™ Intersections, Corners, Angles 90° Angle

Product Number	Ground	Dimensions/Descriptions	Pieces per Box
PRA-50-50	1/2" (13 mm)	90° 1/2" (13 mm) plaster reveal angle.	25
PRA-50-58	5/8" (16 mm)		25
PRA-50-75	3/4" (19 mm)		25
PRA-75-50	1/2" (13 mm)	90° 3/4" (19 mm) plaster reveal angle.	25
PRA-75-58	5/8" (16 mm)		25
PRA-75-75	3/4" (19 mm)		25
PRA-1-50	1/2" (13 mm)	90° 1" (25 mm) plaster reveal angle.	25
PRA-1-58	5/8" (16 mm)		25
PRA-1-75	3/4" (19 mm)		25
PRA-15-50	1/2" (13 mm)	90° 1-1/2" (38 mm) plaster reveal angle.	25
PRA-15-58	5/8" (16 mm)		25
PRA-15-75	3/4" (19 mm)		25
PRA-2-50	1/2" (13 mm)	90° 2" (51 mm) plaster reveal angle.	25
PRA-2-58	5/8" (16 mm)		25
PRA-2-75	3/4" (19 mm)		25
PRA-25-58	5/8" (16 mm)	90° 2-1/2" (64 mm) plaster reveal angle.	25
PRA-3-58	5/8" (16 mm)	90° 3" (76 mm) plaster reveal angle.	25
PRA-3-75	3/4" (19 mm)		25


NEW!


Application:

ULTRA-TRAC™ one-piece intersections are field engineered to give you a durable, clear, clean channel and watertight intersection every time. The one-piece base has built-in alignment guides for the plaster reveal and also provides a base for caulking the connecting reveal. Eliminates the connector clip at intersection.

Specifications:

Intersections shall be ULTRA-TRAC one-piece injection molded as manufactured by Plastic Components, Inc. All exterior accessories shall be of PVC material conforming to ASTM standards D1784, C1063, C1861 and D4216. Part # _____ shall be used at areas indicated on drawings and used with reveal series 700 manufactured by Plastic Components, Inc. They shall be used where specified by the design authority and installed per industry standards.

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).

