



Stucco and Plaster

Section: 09200

Foundation Sill Screeds

Perforated for Masonry Applications

Product Number	Ground	Dimensions/Descriptions	Pieces Per Box
631-50	1/2" (13 mm)	FHA sill screed, 2-1/2" (64 mm) wide perforated flange. Masonry applications.	35
631-58	5/8" (16 mm)		35
631-75	3/4" (19 mm)		35
631-78	7/8" (22 mm)		30

10' (3 m) Lengths

Unperforated for Framing Applications

Product Number	Ground	Dimensions/Descriptions	Pieces Per Box
632-38	3/8" (10 mm)	No holes on stop.	35
632-50	1/2" (13 mm)	FHA Sill screed, 3-1/2" (89 mm) wide unperforated flange. Framing applications.	35
632-58	5/8" (16 mm)		35
632-75	3/4" (19 mm)		35
632-78	7/8" (22 mm)		30
632-100	1" (25 mm)		25

10' (3 m) Lengths

Product Number	Ground	Dimensions/Descriptions	Pieces Per Box
632-78EL	7/8" (22 mm)	1/2" extended leg to accommodate sheathing. FHA Sill screed, 3-1/2" (89 mm) wide flange.	30

Application:


To be installed at plate line or stem wall, to provide a stucco stop. Design allows moisture to migrate down and shed away from wall.

Specification:

Foundation Sill Screeds will be Plastic Components, Inc. #_____. All exterior accessories shall conform to ASTM standards D1784, C1063 and D4216. All products shall be third party tested to meet ASTM standard D4216 and be Canadian Code Compliant. They shall be used where specified by the architect and installed per industry standards.



To order product with short leg, add suffix SL. Example: 632-50SL

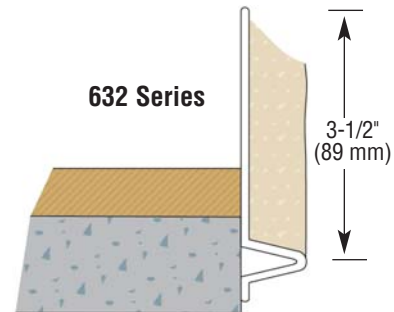

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).

800.327.7077 ■ Fax 305.887.2452
www.plasticcomponents.com