

Stucco and Plaster

Section: 09200

Medium Flange Casing Bead (Weeped or Unweeped)

Product Number	Ground	Dimensions/Descriptions	Pieces per Box
WF1050	1/2" (13 mm)	Medium flange casing bead, 2-1/4" (57 mm) perforated flange.	75
WF1058	5/8" (16 mm)		75
WF1075	3/4" (19 mm)		75
WF1078	7/8" (22 mm)		75

10' (3 m) Lengths



Add suffix "WP" to order with weep holes. Example: WF1050WP

Application:

Use where an standard flange is required at a termination point.

Specification:

Medium Flange Casing Bead shall be Plastic Components, Inc. #_____. All exterior accessories shall be of PVC material conforming to ASTM standards D1784, C1063, C1861 and D4216. They shall be used where specified by the design authority and installed per industry standards.

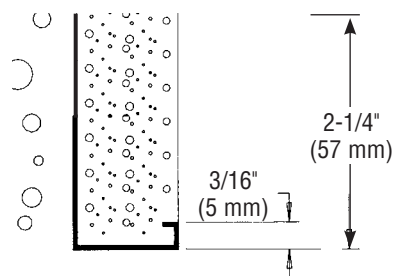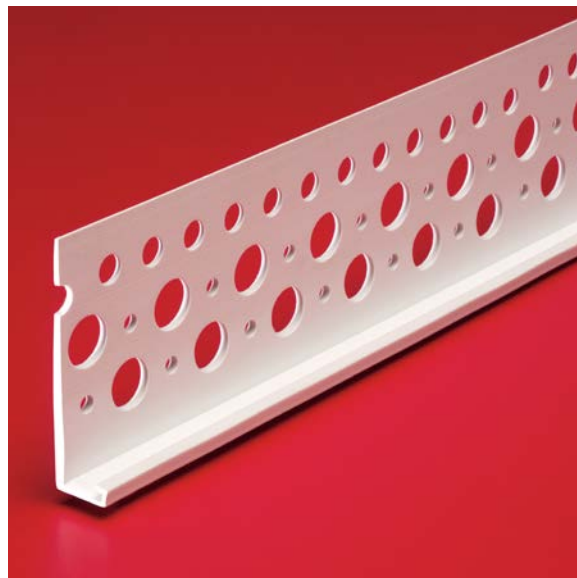

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).