



# Stucco and Plaster

Section: 09200

## Casing Bead for Arches

Product Number	Ground	Dimensions/Descriptions	Pieces Per Box
1025A	1/4" (6 mm)	Arched casing bead, 1-3/4" (44 mm) perforated flange.	75
1038A	3/8" (10 mm)		75
1050A	1/2" (13 mm)		75
1058A	5/8" (16 mm)		75
1075A	3/4" (19 mm)		75
1078A	7/8" (22 mm)		75
1100-0-A	1" (25 mm)		50
1125-0-A	1-1/4" (32 mm)		50
1150-0-A	1-1/2" (38 mm)		50

10' (3 m) Lengths

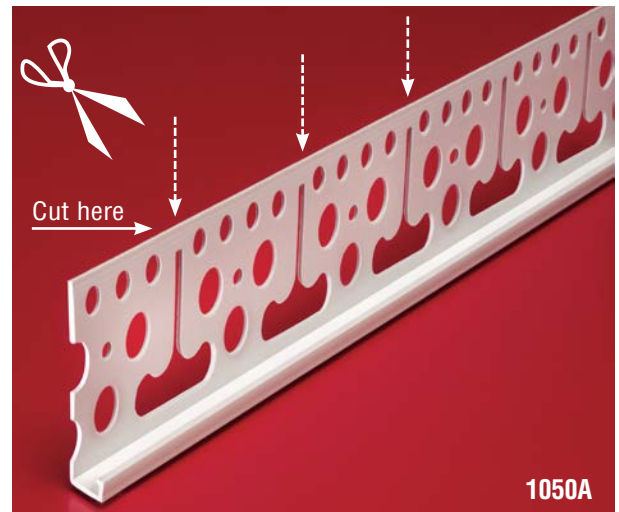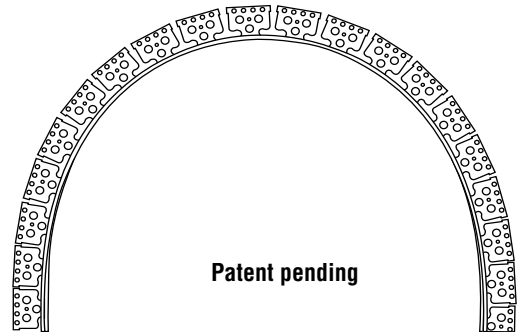

### Application:

For use in any area where an arched detail has been specified. This stucco casing bead can be converted into an arched casing bead by simply cutting the pre-slotted flange.

### Specification:

Arched Casing Bead shall be Plastic Components, Inc. #\_\_\_\_\_. All exterior trim shall be of PVC material that meets ASTM D1784, C926, C1063, C1861, and D4216, shall be third party tested and be Canadian code compliant. They shall be used where specified by the design authority and installed per industry standards.



*All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).*

**800.327.7077 ■ Fax 305.887.2452**  
**www.plasticcomponents.com**