

# Stucco and Plaster


Section: 09200

## "V" Control Joint

Product Number	Ground	Dimensions/Descriptions	Pieces Per Box
2038	3/8" (10 mm)	"V" control joint 4-1/8" (105 mm) overall width with perforated flanges.	35
2050	1/2" (13 mm)		35
2058	5/8" (16 mm)		35
2075	3/4" (19 mm)		30
2078	7/8" (22 mm)		25
2100	1" (25 mm)		20

10' (3 m) Lengths

Connector clips available on request.




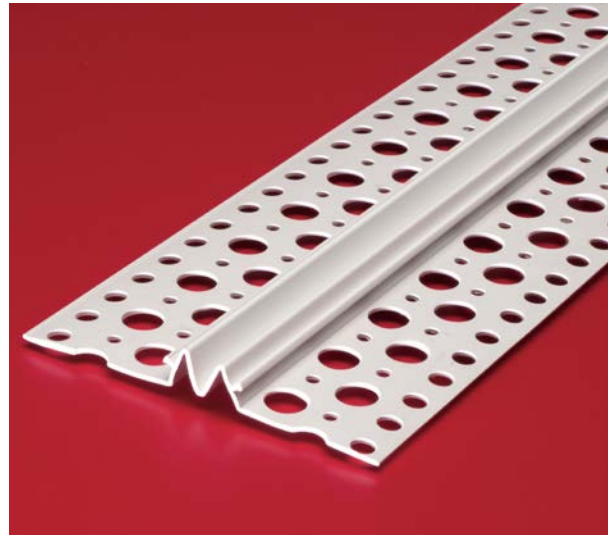


### Application:

Should be used in any application where a surface area is more than 144 square feet. The wide flange allows for more "keying" of the stucco. The "eyebrows" allow for the stucco to key to the "V". Vertical joints should be attached to a stud where necessary. Connector clips available, contact customer service.

### Specification:

Control Joints will be Plastic Components, Inc. #\_\_\_\_\_. All exterior trim shall be of PVC material that meets ASTM D1784, C926, C1063, C1861, and D4216, shall be third party tested and be Canadian code compliant. They shall be used where specified by the design authority and installed per industry standards.

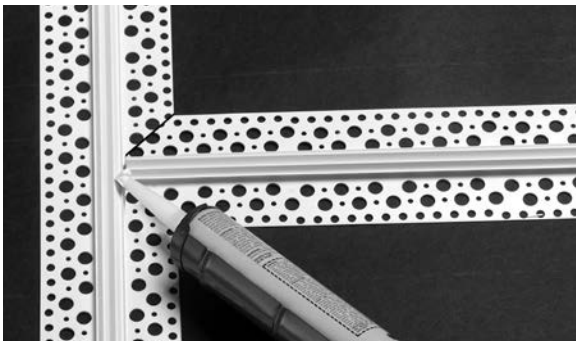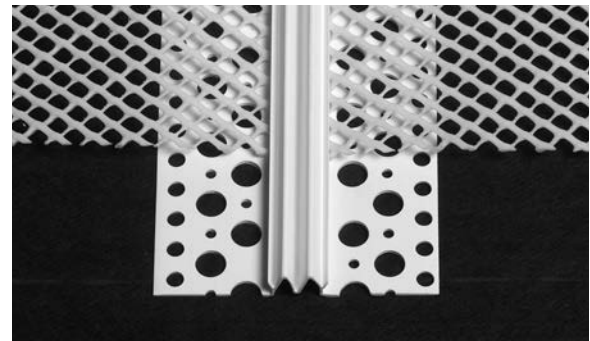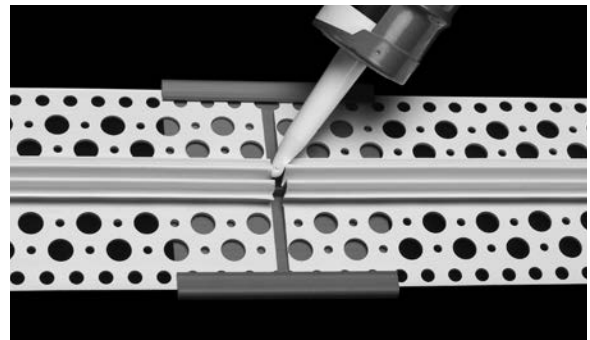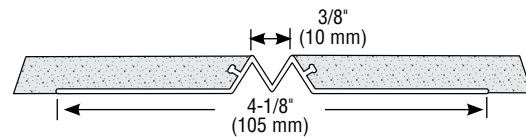

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).