


Stucco and Plaster

Section: 09200

"Z" Flashing for Floor Line Applications



Product Number	Dimensions/Descriptions	Pieces Per Box
SBZ-50	"Z" Flashing 1/2" (13 mm) drip edge for 1/2" (13 mm) board, 3" back flange	30
SBZ-58	"Z" Flashing 1/2" (13 mm) drip edge for 5/8" (16 mm) board, 3" back flange	30
SBZ-75	"Z" Flashing 1/2" (13 mm) drip edge for 3/4" (19 mm) board, 3" back flange	30
SBZ-78	"Z" Flashing 1/2" (13 mm) drip edge for 7/8" (22 mm) board, 3" back flange	30

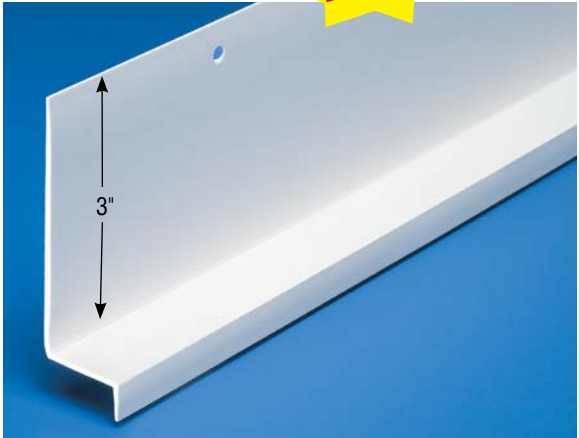


10' (3 m) Lengths

Application:

Designed to use as a drip edge at the floor line to allow moisture to migrate down and shed away from wall and foundation.

Specification:

"Z" Flashing for Floor Line Applications will be Plastic Components, Inc. #_____. All exterior trim shall be of PVC material that meets ASTM D1784, C926, C1063, C1861, and D4216, shall be third party tested and be Canadian code compliant. They shall be used where specified by the design authority and installed per industry standards.

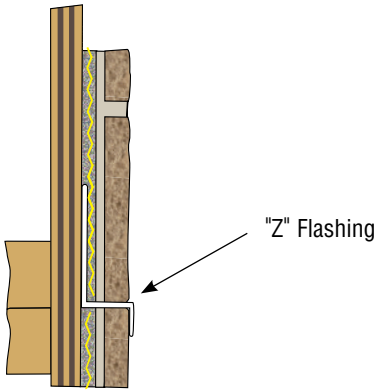

PLASTIC PC[™]
COMPONENTS inc.

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).

800.327.7077 ■ Fax 305.887.2452
www.plasticcomponents.com