## **CI/EIFS/Hard Coat**

Section: 07240

## **Angled Termination Bead**

| Product<br>Number | Dimensions/Descriptions   | Pieces<br>per Box |
|-------------------|---|-------------------|
| 2221-45           | 45° angled bead.<br>For use around any opening<br>as a backing for sealant. | 100               |


10' (3 m) Lengths


## **Application:**

A surface mounted 45 degree angled bead that can be used around windows, doors and any termination point as a backing for perimeter sealant application. All exposed surfaces have striations that provide a positive bonding of caulk and base material. Angled portion is 5/8" (16 mm) wide; surface flange is 1-3/4" (44 mm) wide and has a built-in 1/8" (3 mm) stop to assure proper base and finish thickness.

## **Specifications:**

Angled Termination Bead shall be Plastic Components Inc. #2221-45. All exterior accessories shall meet ASTM standards D1784, C1063 and D4216, shall be third party tested and Canadian Code Compliant. They shall be used where specified by the design authority and installed per industry standards.

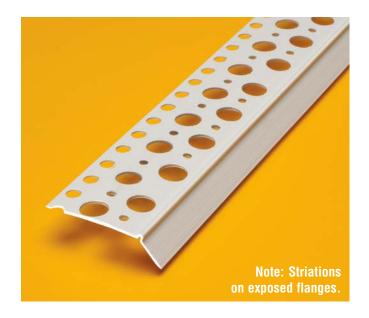

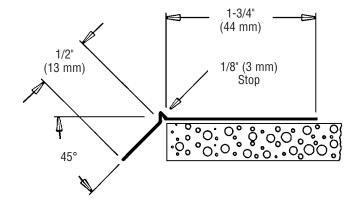





The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.