

Direct Applied Finishes

Section: 07240

DEFS Aesthetic Channel Reveal Intersection

Product Number	Width	Depth	Pieces per Box
2228	3/8" (10 mm)	 1/2" (13 mm)	25
2225	1/2" (13 mm)		25
2229	5/8" (16 mm)		25
2227	3/4" (19 mm)		25
2226	1" (25 mm)		25
2235	1-1/2" (38 mm)		25
2236	2" (51 mm)		25
2237	3" (76 mm)		25
2239	4" (102 mm)		25

To order, add product suffix. Example: 2225C (for Cross), 2225T (for "T"), 2225A (for Angle), 2225EC (for End Closure), 2225OC (for Outside Corner) or 2225IC (for Inside Corner).

Contact customer service at (800) 327-7077 for lead time.


Application:

These factory thermal welded, surface mounted intersections eliminate the costly and time consuming need to field cut intersections.


Specifications:

DEFS Channel Reveal Intersection shall be Plastic Components #_____. All intersections shall be factory fabricated and conform to ASTM standards D1784 and C1063. All products shall be third party tested to meet ASTM standard D4216 and be Canadian Code Compliant. They shall be used where specified by the design authority and installed per industry standards.


Cross (C)

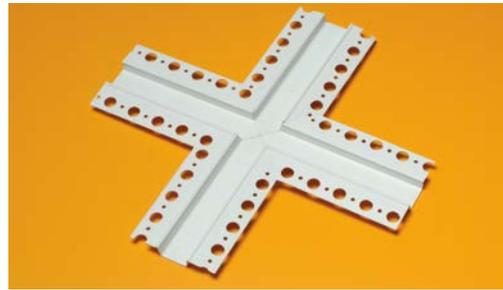

"T" (T)

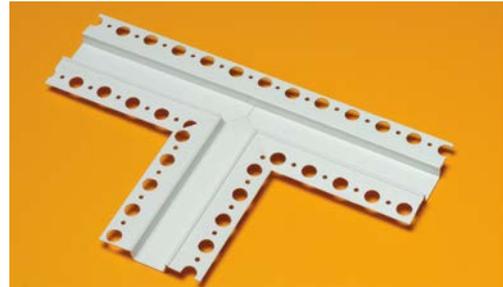


Angle (A)

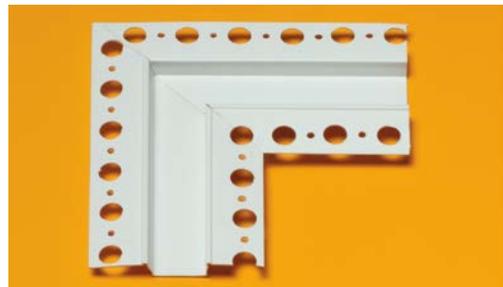


End Closure (EC)



Inside Corner (IC)

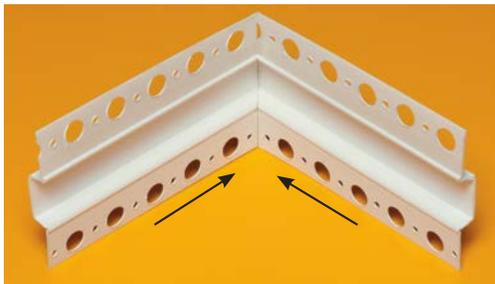

Outside Corner (OC)

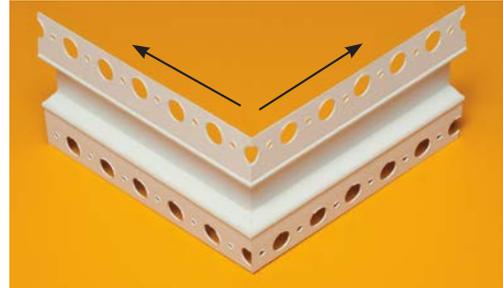

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.