



# CI/EIFS/Hard Coat

Section: 07240

## STARTER TRAC™ with Weep Holes

| Product Number | Dimension A    | Pieces per Box |
|----------------|----------------|----------------|
| STWP-50        | 1/2" (13 mm)   | 35             |
| STWP-58        | 5/8" (16 mm)   | 35             |
| STWP-75        | 3/4" (19 mm)   | 30             |
| STWP-78        | 7/8" (22 mm)   | 30             |
| STWP-1         | 1" (25 mm)     | 25             |
| STWP-125       | 1-1/4" (32 mm) | 20             |
| STWP-15        | 1-1/2" (38 mm) | 20             |
| STWP-158       | 1-5/8" (41 mm) | 15             |
| STWP-175       | 1-3/4" (44 mm) | 15             |
| STWP-2         | 2" (51 mm)     | 15             |
| STWP-225       | 2-1/4" (57 mm) | 15             |
| STWP-25        | 2-1/2" (64 mm) | 15             |
| STWP-275       | 2-3/4" (70 mm) | 10             |
| STWP-3         | 3" (76 mm)     | 10             |
| STWP-35        | 3-1/2" (89 mm) | 10             |
| STWP-4         | 4" (102 mm)    | 10             |

10' (3 m) Lengths

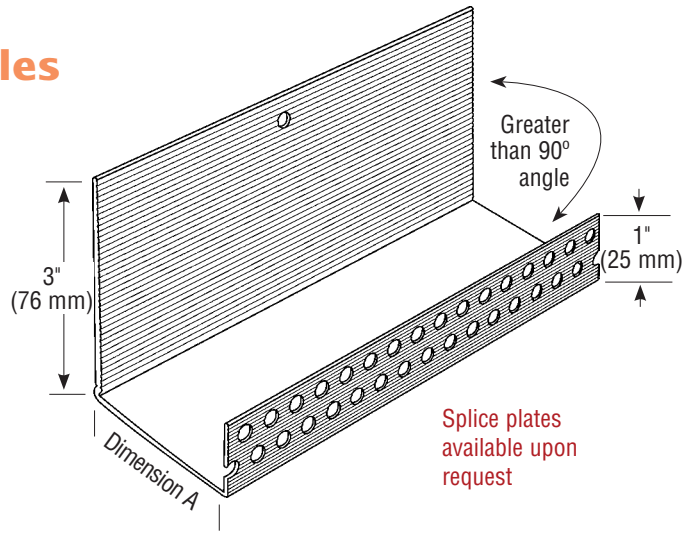

### Application:

Can be used as a STARTER TRAC® at the base of a wall or an EIFS casing bead around window and door openings. Face return flange is 1" (25 mm) with striations which provide a strong physical bond for the base coat and perforations for bonding the base to the substrate. Ideal for use where finished edge is exposed. 3" (76 mm) wide nailing flange also has striations for extra bonding.

### Specifications:

STARTER TRAC® with Weep Holes shall be Plastic Components Inc. #\_\_\_\_\_. All exterior accessories shall meet ASTM standards D1784, C1063 and D4216, shall be third party tested and Canadian Code Compliant. They shall be used where specified by the design authority and installed per industry standards.

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.



305.885.0561 ■ 800.327.7077  
www.plasticcomponents.com