

Direct Applied Finishes

Section: 07240

STARTER TRAC™

Product Number	Description	*Dimension A	Pieces per Box
ST-50	Can be used as STARTER TRAC™ or casing bead. Front return is 3/4" (19 mm) with striations and perforations for positive bonding of base to foam board. There is no Drip Edge. Ideal for use where finished edge is exposed.	1/2" (13 mm)	35
ST-58	Can be used as STARTER TRAC™ or casing bead. Front return is 3/4" (19 mm) with striations and perforations for positive bonding of base to foam board. There is no Drip Edge. Ideal for use where finished edge is exposed. 3" (76 mm) wide nailing flange.	5/8" (16 mm)	35

10 (3 m) Lengths

* Measure Dimension "A" inside to inside.



Splice plates available upon request.

Application:

Can be used as STARTER TRAC or casing bead. Front return is 3/4" (19 mm) with striations and perforations for positive bonding of base to foam board. There is no Drip Edge. Ideal for use where finished edge is exposed. 3" (76 mm) wide nailing flange.

Specifications:

STARTER TRAC shall be Plastic Components Inc. # _____.
 All exterior accessories shall conform to ASTM standards D1784, C1063 and D4216. They shall be used where specified by the design authority and installed per industry standards.

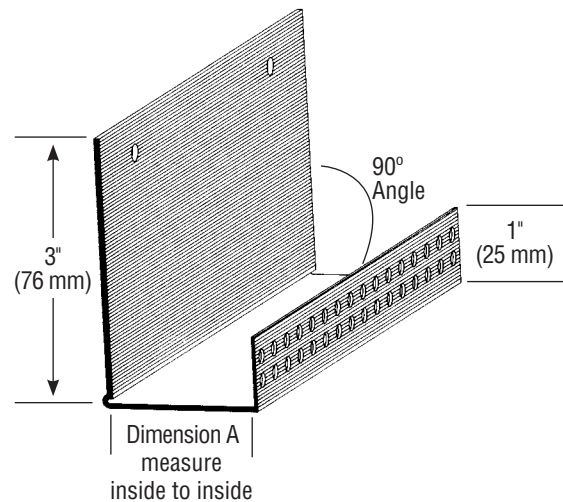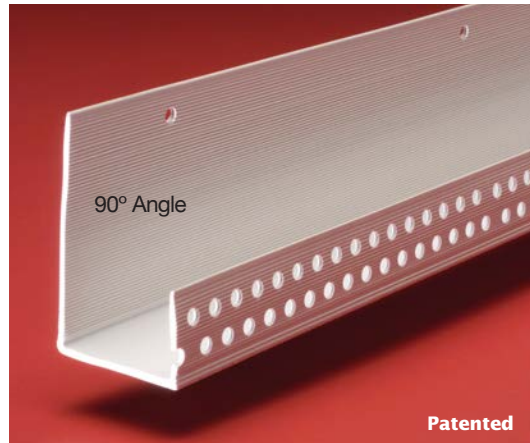

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

305.885.0561 ■ 800.327.7077
www.plasticcomponents.com