

Direct Applied Finishes

Section: 07240

"V" Control Joint

Product Number	Finish Thickness	Pieces per Box
22027-16	1/16" (2 mm)	50
22027-25	1/4" (6 mm)	35
22027-38	3/8" (10 mm)	25



10' (3 m) Lengths

Application:


Designed to be installed between two separated sheets of sheathing board. It has a full 1-1/2" (38 mm) wide flange that rests on top of the sheathing board. The flanges have striations and perforations to ensure positive keying and bonding of the ground coat.

Specifications:

"V" Control Joint shall be Plastic Components Inc. #_____. All exterior accessories shall conform to ASTM standards D1784, C1063 and D4216. They shall be used where specified by the design authority and installed per industry standards.

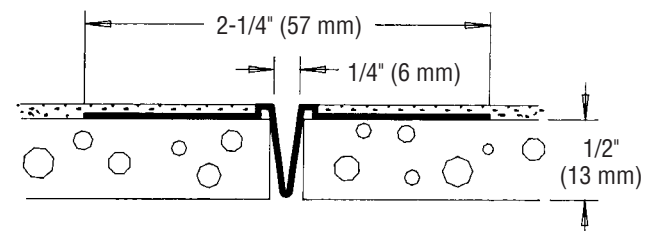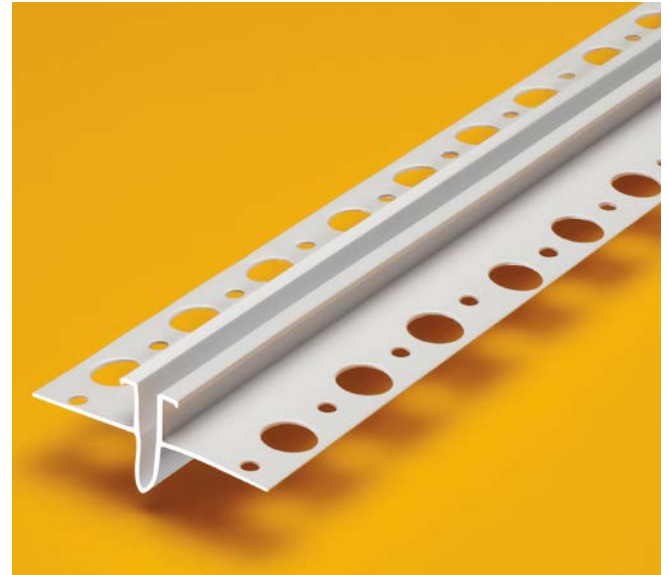

22027-16

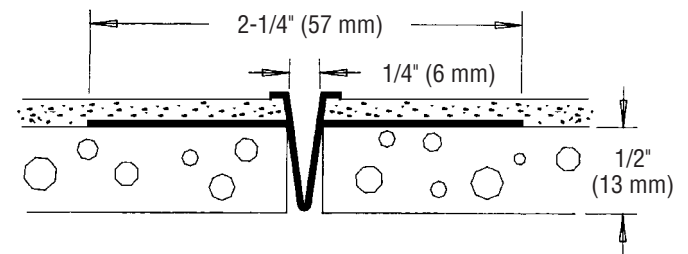22027-25
22027-38

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.