

CI/EIFS/Hard Coat

Section: 07240

i DRIP TRAC™

Product Number	*Dimension A	Pieces per Box
iDT-50	1/2" (13 mm)	35
iDT-58	5/8" (16 mm)	35
iDT-75	3/4" (19 mm)	30
iDT-1	1" (25 mm)	25
iDT-125	1-1/4" (31 mm)	20
iDT-15	1-1/2" (34 mm)	20
iDT-175	1-3/4" (38 mm)	15
iDT-2	2" (51 mm)	15
iDT-225	2-1/4" (57 mm)	15
iDT-25	2-1/2" (64 mm)	15
iDT-275	2-3/4" (70 mm)	10
iDT-3	3" (76 mm)	10
iDT-35	3-1/2" (89 mm)	10
iDT-4	4" (102 mm)	10

10' (3 m) Lengths



*Dimension "A" – measure inside to inside

Application:

i DRIP TRAC™ is a one-piece positive flow combination Starter TRAC® with a built-in flashing drip edge. Weep holes are located at the front of the TRAC to carry moisture away from the building. Uses include above windows and doors; or as a Starter TRAC. The return face flange is 1" (25 mm) wide, with striations which provide a strong physical bond for the base coat to the return flange. A double row of holes allows for positive bond of the base to the substrate. Weep holes are set at 4" (102 mm) on center.

Specifications:

i DRIP TRAC shall be Plastic Components, Inc. # _____.
All exterior accessories shall meet ASTM standards D1784, C1063 and D4216, shall be third party tested and Canadian Code Compliant. They shall be used where specified by the design authority and installed per industry standards.

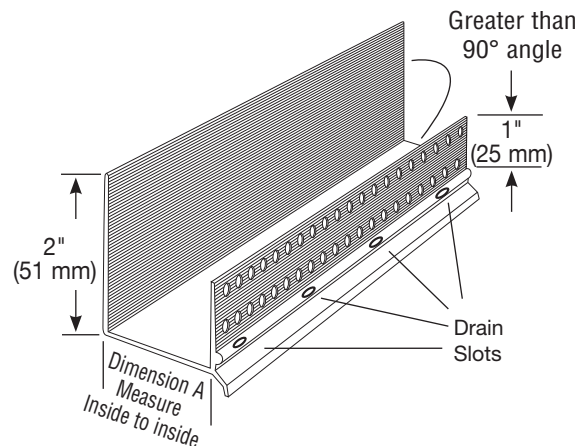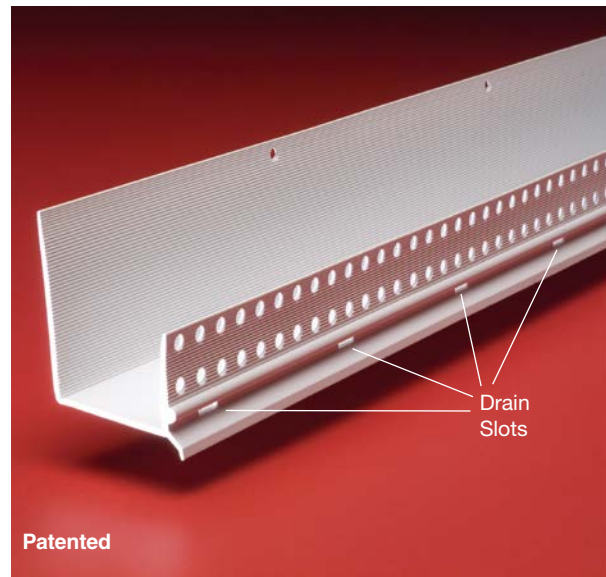

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.