
CI/EIFS/Hard Coat


Section: 07240

Arch Corner Bead

Product Number	Dimension/Description	Pieces Per Box
2209A	Corner bead, 1-5/8" (41 mm) pre-slotted flange.	100

10' (3 m) Lengths



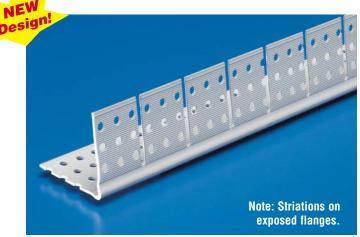

Application:

Designed with wider, striated flanges for better adhesion. For use where an arch or free flow design is specified. One flange is pre-slotted for perfect arches.

Specification:

Corner bead will be Plastic Components, Inc. #_____. All exterior accessories shall meet ASTM standards D1784, C1063, C1861 and D4216, shall be third party tested and Canadian Code compliant. They shall be used where specified by the design authority and installed per industry standards.







The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

800.327.7077 **•** Fax 305.887.2452 www.plasticomponents.com