

Direct Applied Finishes

Section: 07240

CB DEFS Casing Bead/STARTER TRAC® (Weeped or Unweeped)

Product Number	*Dimension A	Pieces Per Box
CB-50-16	1/2" (13 mm)	60
CB-58-16	5/8" (16 mm)	60

10' (3 m) Lengths


Add suffix "WP" to order with weep holes.
Example: CBWP-50-16

Application:

Serves as a protective edge for sheathing material at areas of termination. Eliminates the need to back wrap; provides a clean starting detail. Excellent caulk and paint adhesion, holes on return flange allow for base coat to bond to surface of substrate.

Specification:

Casing Bead/STARTER TRAC® will be Plastic Components, Inc. #_____. All exterior accessories shall meet ASTM standards D1784, C1063, C1861 and D4216, shall be third party tested and Canadian Code compliant. They shall be used where specified by the design authority and installed per industry standards.

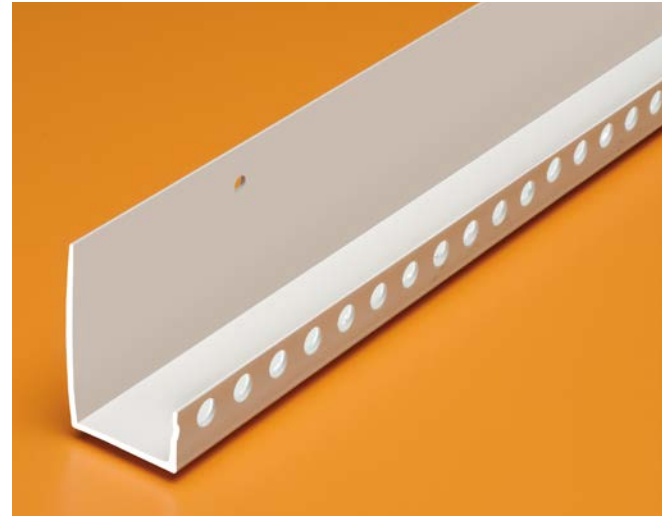

*Measure
Dimension "A"
inside to inside.

