


Direct Applied Finishes

Section: 07240

Continuous Soffit Vent

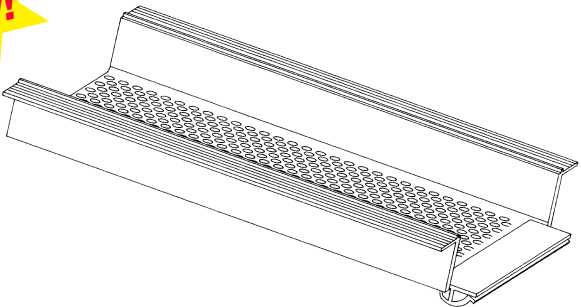

Product Number	Vent Area	Air Flow Per Linear ft.	Pieces Per Box
548-58HI	2-5/8" (67 mm)	14 sq. in. (9,033 sq. mm)	13

10' (3 m) Lengths – Connector clips included.

Application:

Designed specifically for sheathing products. Has a built-in stop (1/8"-3 mm) to assure proper base thickness as well as maintaining a clean finish edge. The serrated top flange with stop is designed for positive material bonding and as a termination point for the finish. Will not rust, excellent paint adhesion. Connector clips are provided to eliminate sagging at butt joints.

Specification:

Continuous Soffit Vent will be Plastic Components, Inc. # _____. All exterior accessories shall meet ASTM standards D1784, C1063, C1861 and D4216, shall be third party tested and Canadian Code compliant. They shall be used where specified by the design authority and installed per industry standards.



The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

800.327.7077 ■ Fax 305.887.2452
www.plasticcomponents.com