Direct Applied Finishes

Angled Termination Bead

Product Number	Dimension/Description	Pieces Per Box
2221-45	45° angled bead. For use around any opening as a backing for sealant.	100


10' (3 m) Lengths


Application:

A surface mounted 45 degree angled bead that can be used around windows, doors and any termination point as a backing for perimeter sealant application. All exposed surfaces have striations that provide a positive bonding of caulk and base material. Angled portion is 1/2" (13 mm) wide; surface flange is 1-3/4" (44 mm) wide and has a built in 1/8" (3 mm) stop to assure proper base and finish thickness.

Specification:

Angled Termination Bead will be Plastic Components, Inc. #_____. All exterior accessories shall meet ASTM standards D1784, C1063, C1861 and D4216, shall be third party tested and Canadian Code compliant. They shall be used where specified by the design authority and installed per industry standards.

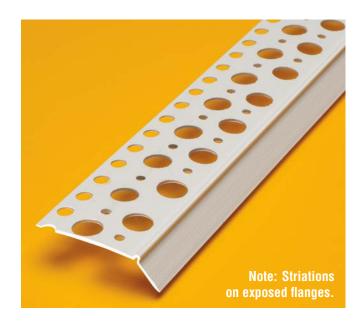

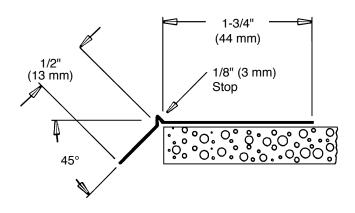

Warnock Hersey



The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

800.327.7077 = Fax 305.887.2452 www.plasticomponents.com

Section: 07240