

# Direct Applied Finishes

Section: 07240

## Sill Wedge

Product Number	Width	Dimensions/Descriptions	Pieces Per Box
<b>SW-3-78</b>	3" (76 mm)	Water management product designed to provide positive slope at window sill. Window frame sits on sloped sill wedge and directs moisture towards the face of the moisture barrier where it drains out of the bottom of the system.	30
<b>SW-5-78</b>	5" (127 mm)		30

10' (3 m) Lengths




### Application:

The sill wedge provides a base for window frames. Its positive slope directs moisture away from the sill, towards the face of the moisture barrier and out the bottom of the system.

### Specification:

Sill Wedge will be Plastic Components, Inc. #\_\_\_\_\_. All exterior accessories shall meet ASTM standards D1784, C1063, C1861 and D4216, shall be third party tested and Canadian Code compliant. They shall be used where specified by the design authority and installed per industry standards.

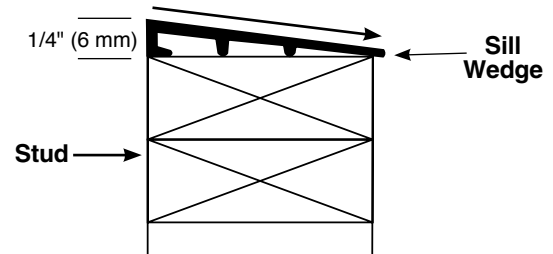

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

**800.327.7077 ■ Fax 305.887.2452**  
[www.plasticcomponents.com](http://www.plasticcomponents.com)