

Stucco and Plaster







Section: 09200

Continuous Soffit Vent for Soffit Applications 1-3/4", 2-5/8", 3", 4" and 6" vents

Product Number	Reveal	Vent Area	Air Flow/linear ft.	Pieces Per Box
300	3/8" (10 mm)	2-5/8" (67 mm)	15 sq. in. (9,678 sq. mm)	50
301	3/8" (10 mm)	1-3/4" (44 mm)	7 sq. in. (4,516 sq. mm)	50
3300	3/8" (10 mm)	3" (76 mm)	15 sq. in. (9,678 sq. mm)	35
4300	3/8" (10 mm)	4" (102 mm)	16 sq. in. (10,323 sq. mm)	35
6300	3/8" (10 mm)	6" (152 mm)	20 sq. in. (12,904 sq. mm)	30

10' (3 m) Lengths

Connector Clips Included

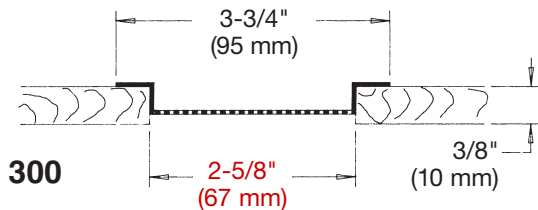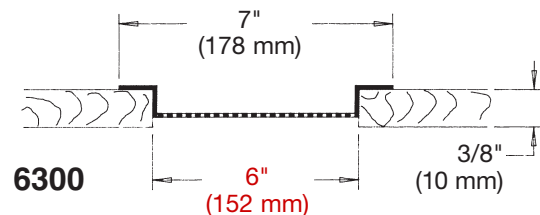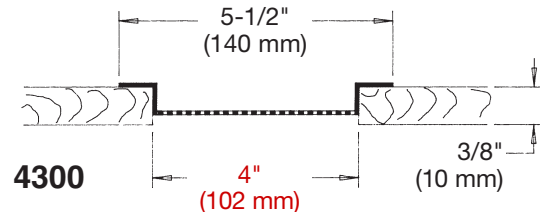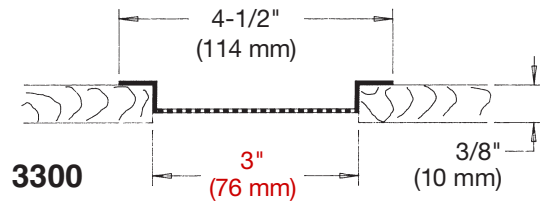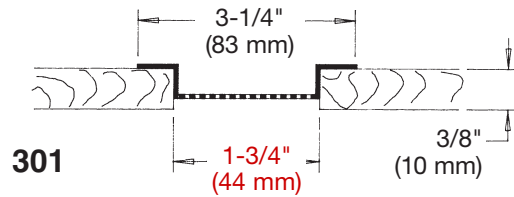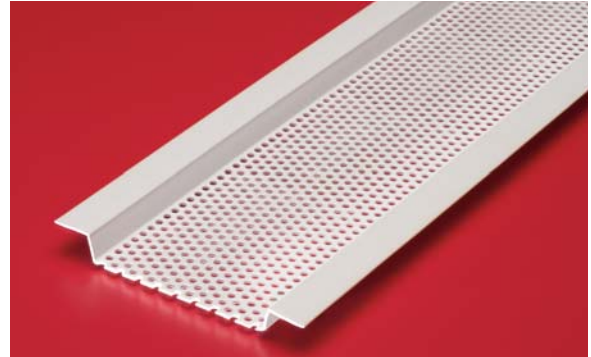

Application:

Used on soffits where 3/8" (10 mm) sheathing is being used. Excellent paint adhesion. Connector clips included. Will not rust or corrode. Can also be surface mounted for a finished look.

Specification:

Soffit Vent will be Plastic Components, Inc. #_____. All exterior accessories shall conform to ASTM standards D1784, C1063 and D4216. All products shall be third party tested to meet ASTM standard D4216 and be Canadian Code Compliant. They shall be used where specified by the architect and installed per industry standards.