

# Fiber Cement Board Trims

Section: 09200

## Continuous Soffit Vent for Soffit Applications 1-3/4", 2-5/8", 3", 4" and 6" vents

Product Number	Reveal	Vent Area	Air Flow/linear ft.	Pieces Per Box
<b>300</b>	3/8" (10 mm)	2-5/8" (67 mm)	15 sq. in. (9,678 sq. mm)	50
<b>301</b>	3/8" (10 mm)	1-3/4" (44 mm)	7 sq. in. (4,516 sq. mm)	50
<b>3300</b>	3/8" (10 mm)	3" (76 mm)	15 sq. in. (9,678 sq. mm)	35
<b>4300</b>	3/8" (10 mm)	4" (102 mm)	16 sq. in. (10,323 sq. mm)	35
<b>6300</b>	3/8" (10 mm)	6" (152 mm)	20 sq. in. (12,904 sq. mm)	30

10' (3 m) Lengths



**Connector Clips Included**

### Application:


Used on soffits where 3/8" (10 mm) sheathing is being used. Excellent paint adhesion. Connector clips included. Will not rust or corrode.

### Specification:


Soffit Vent will be Plastic Components, Inc. #\_\_\_\_\_. All exterior trim shall be of PVC material that meets ASTM D1784, C926, C1063, C1861, and D4216, shall be third party tested and be Canadian code compliant. They shall be used where specified by the design authority and installed per industry standards.

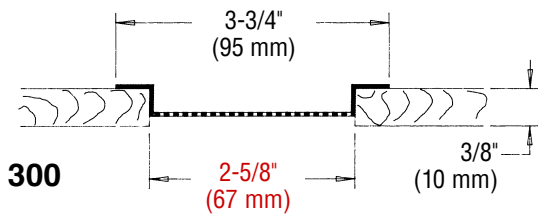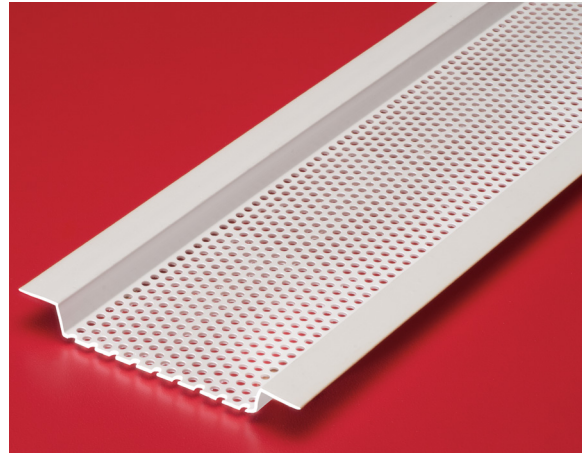


**300**

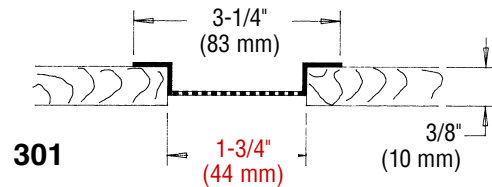


**301**

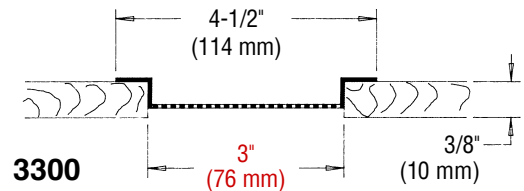


**3300**

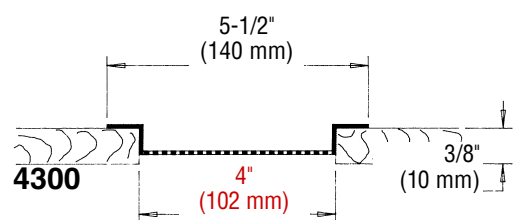

**4300**

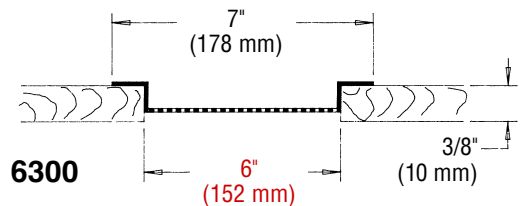

**6300**

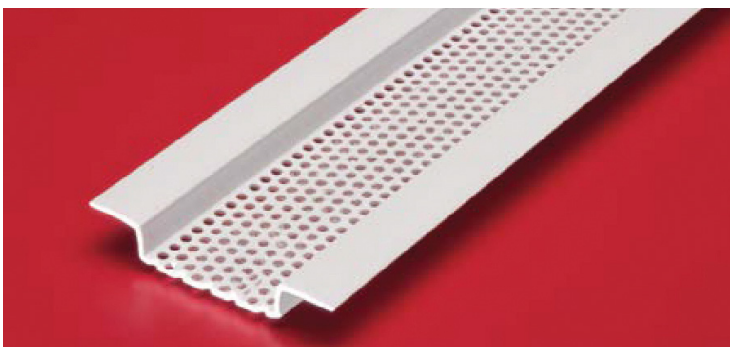

**PLASTIC PC<sup>TM</sup>**  
**COMPONENTS inc.**

305.885.0561 ■ 800.327.7077  
[www.plasticcomponents.com](http://www.plasticcomponents.com)