Stucco and Plaster


Section: 09200

Continuous Soffit Vent "F" Series 2-3/8", 3", 4" and 6" vents

Product Number	Ground	Vent Area	Air Flow/linear ft.	Pieces Per Box
F549-50	1/2" (13 mm)	2-3/8" (60 mm)	15 sq. in. (9,678 sq. mm)	13
F549-58	5/8" (16 mm)	2-3/8" (60 mm)	15 sq. in. (9,678 sq. mm)	13
F549-75	3/4" (19 mm)	2-3/8" (60 mm)	15 sq. in. (9,678 sq. mm)	13
F549-78	7/8" (22 mm)	2-3/8" (60 mm)	15 sq. in. (9,678 sq. mm)	13
F3549-50	1/2" (13 mm)	3" (76 mm)	15 sq. in. (9,678 sq. mm)	13
F3549-58	5/8" (16 mm)	3" (76 mm)	15 sq. in. (9,678 sq. mm)	13
F3549-75	3/4" (19 mm)	3" (76 mm)	15 sq. in. (9,678 sq. mm)	13
F3549-78	7/8" (22 mm)	3" (76 mm)	15 sq. in. (9,678 sq. mm)	13
F4549-50	1/2" (13 mm)	4" (102 mm)	16 sq. in. (10,323 sq. mm)	13
F4549-58	5/8" (16 mm)	4" (102 mm)	16 sq. in. (10,323 sq. mm)	13
F4549-75	3/4" (19 mm)	4" (102 mm)	16 sq. in. (10,323 sq. mm)	13
F4549-78	7/8" (22 mm)	4" (102 mm)	16 sq. in. (10,323 sq. mm)	13
F6549-50	1/2" (13 mm)	6" (152 mm)	18 sq. in. (11,614 sq. mm)	10
F6549-75	3/4" (19 mm)	6" (152 mm)	18 sq. in. (11,614 sq. mm)	10

10' (3 m) Lengths
Connector Clips Included



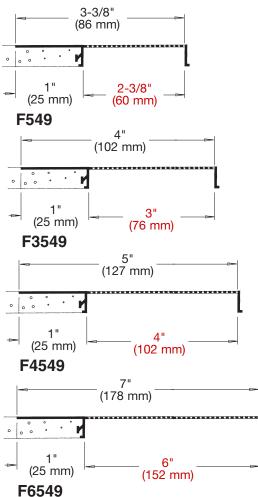

Application:

Allows for installation against wall or fascia board areas of soffit. Connector clip included. Contact customer service for price, availability and delivery information.

Specification:

Soffit Vent will be Plastic Components, Inc. #_____. All exterior accessories shall conform to ASTM standards D1784, C1063 and D4216. All exterior trim shall be of PVC material that meets ASTM D1784, C926, C1063, C1861, and D4216, shall be third party tested and be Canadian code compliant. They shall be used where specified by the design authority and installed per industry standards.



