

Stucco and Plaster

Section: 09200

Drip Screed

Product Number	Ground	Dimensions/Descriptions	Pieces Per Box
540-38	3/8" (10 mm)	Soffit drip screed with 2" x 2" perforated flange. (51 mm x 51 mm).	15
540-50	1/2" (13 mm)		15
540-58	5/8" (16 mm)		15
540-75	3/4" (19 mm)		15
540-78	7/8" (22 mm)		15


10' (3 m) Lengths • **Product ships unassembled.**

Application:

Prevents water from turning under and back into the soffit. Also serves as an expansion joint.

Specification:

Drip Screed will be Plastic Components, Inc. # _____. All exterior trim shall be of PVC material that meets ASTM D1784, C926, C1063, C1861, and D4216, shall be third party tested and be Canadian code compliant. They shall be used where specified by the design authority and installed per industry standards.

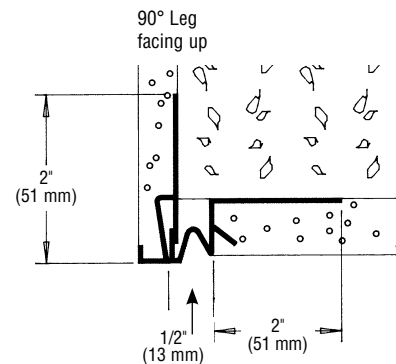

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).



800.327.7077 ■ Fax 305.887.2452
www.plasticcomponents.com