
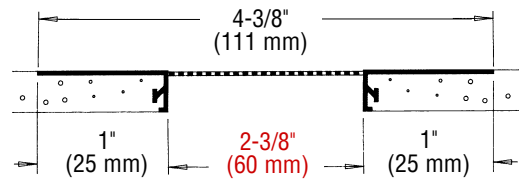


Stucco and Plaster


Section: 09200

Continuous Soffit Vent 2-3/8", 3", 4" and 6" vents


Product Number	Ground	Vent Area	Air Flow/linear ft.	Pieces Per Box
549-50	1/2" (13 mm)	2-3/8" (60 mm)	15 sq. in. (9,678 sq. mm)	13
549-58	5/8" (16 mm)	2-3/8" (60 mm)	15 sq. in. (9,678 sq. mm)	13
549-75	3/4" (19 mm)	2-3/8" (60 mm)	15 sq. in. (9,678 sq. mm)	13
549-78	7/8" (22 mm)	2-3/8" (60 mm)	15 sq. in. (9,678 sq. mm)	13
3549-50	1/2" (13 mm)	3" (76 mm)	15 sq. in. (9,678 sq. mm)	13
3549-58	5/8" (16 mm)	3" (76 mm)	15 sq. in. (9,678 sq. mm)	13
3549-75	3/4" (19 mm)	3" (76 mm)	15 sq. in. (9,678 sq. mm)	13
3549-78	7/8" (22 mm)	3" (76 mm)	15 sq. in. (9,678 sq. mm)	13
4549-50	1/2" (13 mm)	4" (102 mm)	16 sq. in. (10,323 sq. mm)	13
4549-58	5/8" (16 mm)	4" (102 mm)	16 sq. in. (10,323 sq. mm)	13
4549-75	3/4" (19 mm)	4" (102 mm)	16 sq. in. (10,323 sq. mm)	13
4549-78	7/8" (22 mm)	4" (102 mm)	16 sq. in. (10,323 sq. mm)	13
6549-50	1/2" (13 mm)	6" (152 mm)	18 sq. in. (11,614 sq. mm)	10
6549-75	3/4" (19 mm)	6" (152 mm)	18 sq. in. (11,614 sq. mm)	10

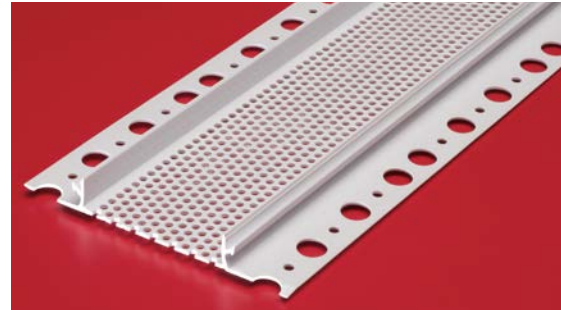


549

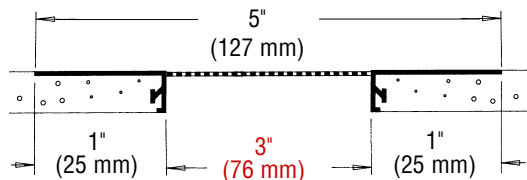

3549

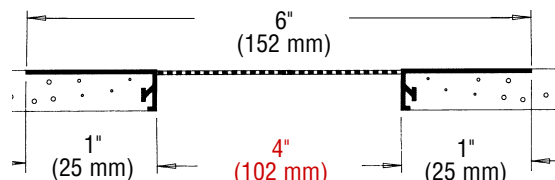

4549

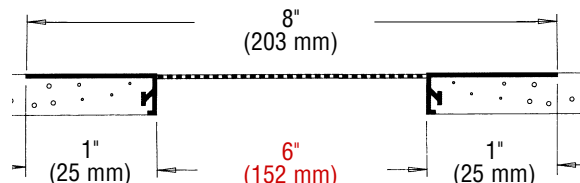

6549

10' (3 m) Lengths
Connector Clips Included

Application:

Low-cost and simple solution to venting soffit areas. Wide nailing flange makes installation easier. Will not rust. Excellent paint adhesion. "Eyebrow" assures excellent keying of stucco to the leg. Connector clip included.

Specification:

Soffit Vent will be Plastic Components, Inc. #_____. All exterior trim shall be of PVC material that meets ASTM D1784, C926, C1063, C1861, and D4216, shall be third party tested and be Canadian code compliant. They shall be used where specified by the design authority and installed per industry standards.



800.327.7077 ■ Fax 305.887.2452
www.plasticcomponents.com