
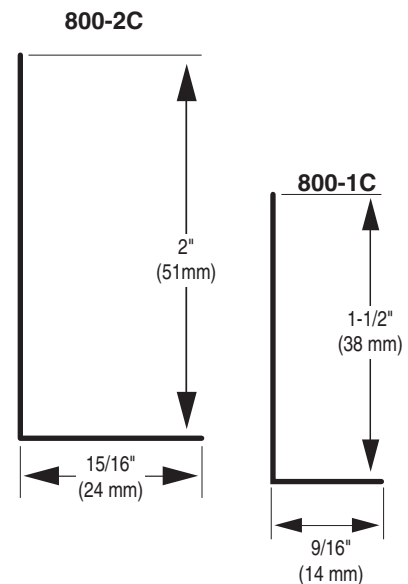
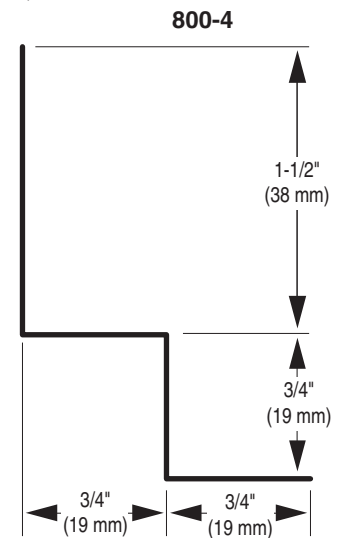


Drywall Accessories

Section: 09260

Minimum Radius - RADii Trim System

Catalog Number	Inside Radius	Outside Radius	Product Length	Linear Length (lf)(lm)	Packaging (Pcs per Tube)
PC800-1C	15 in. (38 cm)	15 in. (38 cm)	8 ft (2.43 m)	250 lf (98.5 lm)	25
PC800-2C	24 in. (61 cm)	24 in. (61 cm)	8 ft (2.43 m)	250 lf (98.5 lm)	25
PC800-3	30 in. (76 cm)	30 in. (76 cm)	8 ft (2.43 m)	200 lf (79 lm)	25
PC800-4	54 in. (137 cm)	54 in. (137 cm)	8 ft (2.43 m)	160 lf (63 lm)	20
PC800-6	30 in. (76 cm)	30 in. (76 cm)	8 ft (2.43 m)	200 lf (79 lm)	25

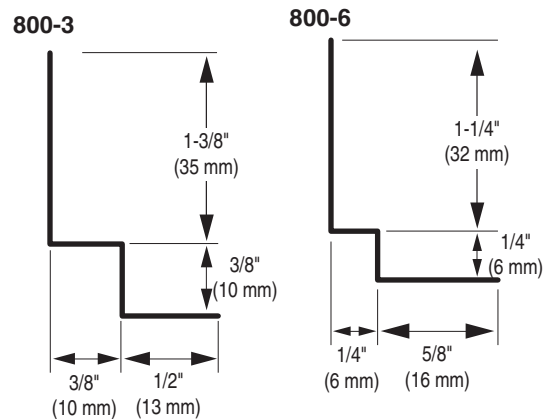

Sample Specification

The wall angle for radius treatments shall be as manufactured by RADii Systems (distributed by Plastic Components Inc.) from proprietary resins with the following technical characteristics:

Property	PC800-1C, PC800-2C	PC800-3, PC800-4 PC800-6
Hardness (Shore A, =/-3)	96	96
Instantaneous Specific Gravity (+/.02)	1.31	1.31
Tensile (PSI)	>3000	>3,000
100% Modulus PSI	>1900	>1,900
Elongation %	>200	>200
Ignitability (ASTM D1929)	346°C	330°C
Flammability (LOI/ASTM D2863)	45-49	46-48
Flame Spread (ASTM E1 62)	10	10