


We recommend Plastic Components trims for all applications using ULTRA-LATH PLUS plastic lath.

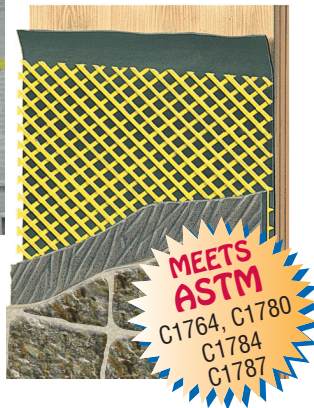

Fasteners

Type	Size	Length	Head
Roofing Nails	#11 gauge	1" (25 mm)	7/16" (11 mm)
Staples	#14 gauge	1" (25 mm)	7/16" (11 mm)
Common Nails	#4d	1-1/2" (38 mm)	1/4" (6 mm)
Stub Nails		3/8" to 1/2" (10 to 13 mm)	3/16" (5 mm)
Screws	Self-tapping wafer head	3/4" (19 mm)	5/16" (8 mm)

All fasteners should be installed with a minimum of 6 inches (152 mm) on center to the framing members or cementitious substrate. Nails or screws should be set flush to the ULTRA-LATH PLUS surface but **do not countersink** into the surface. Common nails should be bent over to engage a minimum of 3 strands of lath. **Do not countersink.**

ULTRA-LATH PLUS™ P L A S T I C L A T H

in Sheets, Rolls and Strips

Installation

Plastic Components ULTRA-LATH PLUS™ Plastic Lath is designed as continuous reinforcement for stucco used in either exterior or interior wall applications. The 1/4" self-furring ridges provide exceptional keying and shall be installed with the ribbed surface against any code-approved substrate. It is lightweight and impervious to sand and any harsh chemicals found in portland-based stucco. **WILL NEVER RUST OR CORRODE.**

Not for use on open framing or horizontal soffit applications.



Splicing

Lap a minimum of 1 inch (25 mm) and nail 6 inches (152 mm) on center.

Overlapping

Overlapping a minimum of 1/2 inch (13 mm) and either wire tie or use a cable tie at a minimum of 9 inches (229 mm) on center. On plywood sheathing, overlaps may be nailed or stapled in lieu of wire ties.

Specification

ULTRA-LATH PLUS™ shall be Plastic Components, Inc. #PDM series. It shall be used where specified by the architect and installed per industry standards, and ASTM C1063, C1764, C1780, C1787 and C1788. ULTRA-LATH PLUS is recognized by IAPMO Uniform Evaluation Services report #0284 as code compliant to the 2009 and 2012 IBC and IRC.

For questions regarding fire resistance, please contact our technical sales department.



Patent pending / IAPMO Uniform Evaluation Report #0284



*Instrucciones en
español al dorso*