

# CI/EIFS/Hard Coat


Section: 07240

## Surface Mounted Vent 3", 4" and 6" wide vents

Product Number	Vent Area	Free Air Flow per linear ft.	Pieces Per Box
SMV3	3" (76 mm)	15 sq. inches (9,678 sq. mm)	35
SMV4	4" (102 mm)	16 sq. inches (10,323 sq. mm)	35
SMV6	6" (152 mm)	20 sq. inches (12,904 sq. mm)	30

10' (3 m) Lengths – Connector clips included

1/8" (3 mm) ground. For all applications except stucco.

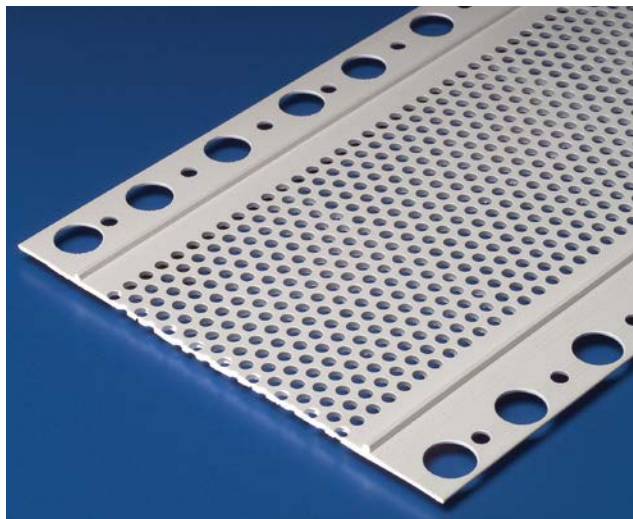

### Application:

A surface mounted vent suitable for all applications, except stucco. SMV3 installs easily on all sheathing products with either spray adhesives, or screws. For foam applications, a non-solvent base spray adhesive or a 3/4" (19 mm) pin-tac is recommended for attachment. All flanges must be base coated and covered with mesh per system manufacturer.

### Specification:

Surface Mounted Vent will be Plastic Components, Inc. #\_\_\_\_\_. All exterior accessories shall meet ASTM standards D1784, C1063, C1861 and D4216, shall be third party tested and Canadian Code compliant. They shall be used where specified by the design authority and installed per industry standards.



The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

800.327.7077 ■ Fax 305.887.2452  
www.plasticcomponents.com