




BENEFITS

- Meets ASTM D1784, C1063, C1861 and D4216
- Combines weeped STARTER TRACTM and termination bead into a single piece
- Lightweight, easy for installers to handle
- Saves time, improves job quality

Save time and installation costs with Plastic Components' continuous insulation trims.

This one piece STARTER TRACTM has a built-in termination bead that improves job quality and saves on labor. Designed for the base of a hard coat stucco CI wall, the **STCI series** comes with a 3/4" or 7/8" ground. And delivers a better finish for 1-1/2", 2" or 2-1/2" foam with three-coat stucco finishes.

Patent pending

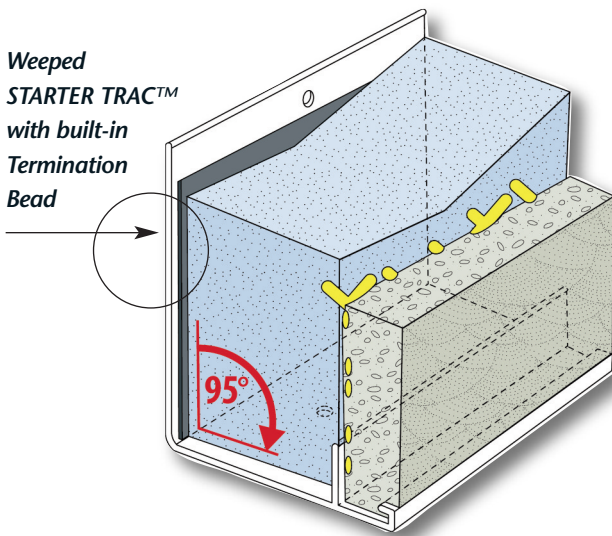

for use with 3/4"
Three-coat Stucco Finishes

Product Number	Foam Thickness	Description for Foam Systems	Stucco Ground	Pieces per Box
STCI-15-75	1-1/2" (38 mm)	One-piece Hard Coat TRAC TM with built-in termination bead	3/4" (19 mm)	8
STCI-2-75	2" (51 mm)		3/4" (19 mm)	8
STCI-25-75	2-1/2" (64 mm)		3/4" (19 mm)	8

10' (3 m) lengths

for use with 7/8"
Three-coat Stucco Finishes

Product Number	Foam Thickness	Description for Foam Systems	Stucco Ground	Pieces per Box
STCI-15-78	1-1/2" (38 mm)	One-piece Hard Coat TRAC TM with built-in termination bead	7/8" (22 mm)	8
STCI-2-78	2" (51 mm)		7/8" (22 mm)	8
STCI-25-78	2-1/2" (64 mm)		7/8" (22 mm)	8

10' (3 m) lengths

Plastic Components' exterior trims are UV resistant, and manufactured of high-impact resistant, lead-free PVC compounds that meet ASTM standards D1784 and C1063 (for exterior stucco, one coat, DEFS and EIFS applications), D1784 (for exterior stucco), and D3678 and C1047 (for interior drywall).

