




BENEFITS

- Meets ASTM D1784, C1063, C1861 and D4216
- Combines weeped STARTER TRACTM and termination bead into a single piece
- Lightweight, easy for installers to handle
- Saves time, improves job quality

Save time and installation costs with Plastic Components' continuous insulation trims.

This one piece STARTER TRACTM has a built-in termination bead that improves job quality and saves on labor. Designed for the base of a hard coat stucco CI wall, the **STCI series** comes with a 3/4" or 7/8" ground. And delivers a better finish for 1-1/2", 2" or 2-1/2" foam with three-coat stucco finishes.

Patent pending

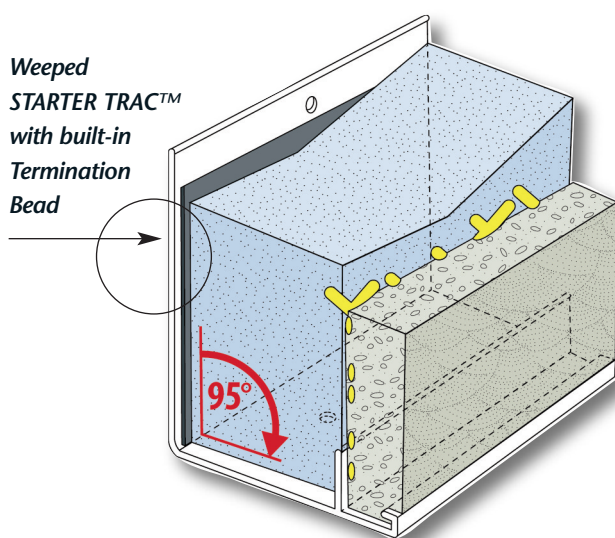

for use with 3/4" Three-coat Stucco Finishes

Product Number	Foam Thickness	Description for Foam Systems	Stucco Ground	Pieces per Box
STCI-15-75	1-1/2" (38 mm)	One-piece Hard Coat TRAC TM with built-in termination bead	3/4" (19 mm)	15
STCI-2-75	2" (51 mm)		3/4" (19 mm)	15
STCI-25-75	2-1/2" (64 mm)		3/4" (19 mm)	15

10' (3 m) lengths

for use with 7/8" Three-coat Stucco Finishes

Product Number	Foam Thickness	Description for Foam Systems	Stucco Ground	Pieces per Box
STCI-15-78	1-1/2" (38 mm)	One-piece Hard Coat TRAC TM with built-in termination bead	7/8" (22 mm)	15
STCI-2-78	2" (51 mm)		7/8" (22 mm)	15
STCI-25-78	2-1/2" (64 mm)		7/8" (22 mm)	15

10' (3 m) lengths

Plastic Components' exterior trims are UV resistant, and manufactured of high-impact resistant, lead-free PVC compounds that meet ASTM standards D1784 and C1063 (for exterior stucco, one coat, DEFS and EIFS applications), D1784 (for exterior stucco), and D3678 and C1047 (for interior drywall).

Warnock Horsey
W
CORP.
LISTED PRODUCT