

CI/EIFS/Hard Coat

Section: 07240

Hard Coat Trac™ for Base of CI Wall for use with 3/4" (19 mm) Three-coat Stucco Finishes



Product Number	Foam Thickness	Description for Foam Systems	Stucco Ground	Pieces per Box
STCI-15-75	1-1/2" (38 mm)	One-piece Hard Coat TRAC™ with built-in termination bead	3/4" (19 mm)	8
STCI-2-75	2 (51 mm)		3/4" (19 mm)	8
STCI-25-75	2-1/2 (64 mm)		3/4" (19 mm)	8

10' (3 m) lengths

for use with 7/8" (22 mm) Three-coat Stucco Finishes

Product Number	Foam Thickness	Description for Foam Systems	Stucco Ground	Pieces per Box
STCI-15-78	1-1/2" (38 mm)	One-piece Hard Coat TRAC™ with built-in termination bead	7/8" (22 mm)	8
STCI-2-78	2 (51 mm)		7/8" (22 mm)	8
STCI-25-78	2-1/2 (64 mm)		7/8" (22 mm)	8


10' (3 m) lengths

Application:

Designed for the base of a hard coat CI wall, this weeped STARTER TRAC™ combines the Trac with a built-in termination bead. Made of contractor-grade PVC, trims are made for use with three-coat stucco finishes. [Click here to view with 7/8" Stucco Finish](#)

Specifications:

Hard Coat TRAC™ for Foam Systems with Stucco Finish shall be Plastic Components, Inc. # _____. All exterior accessories shall meet ASTM D1784, C1063, C1861 and D4216. They shall be used where specified by the design authority and installed per industry standards.

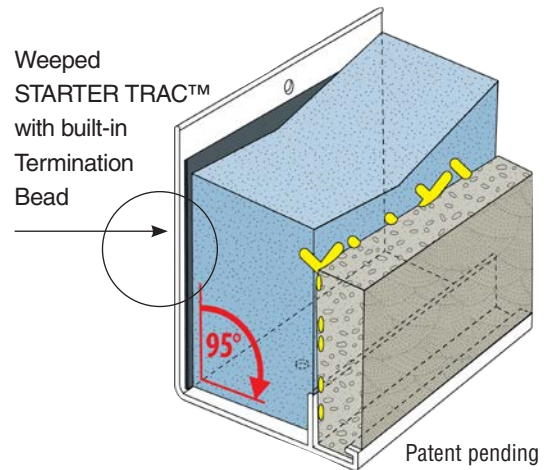

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

