




Reduces Thermal Bridging in Continuous Installation

Moisture Management and Energy Savings at its Best!

- Heavy-duty 1/8" thick PVC for additional strength
- For 2", 2-1/2" and 3" foam in CI, Hard Coat and EIFS

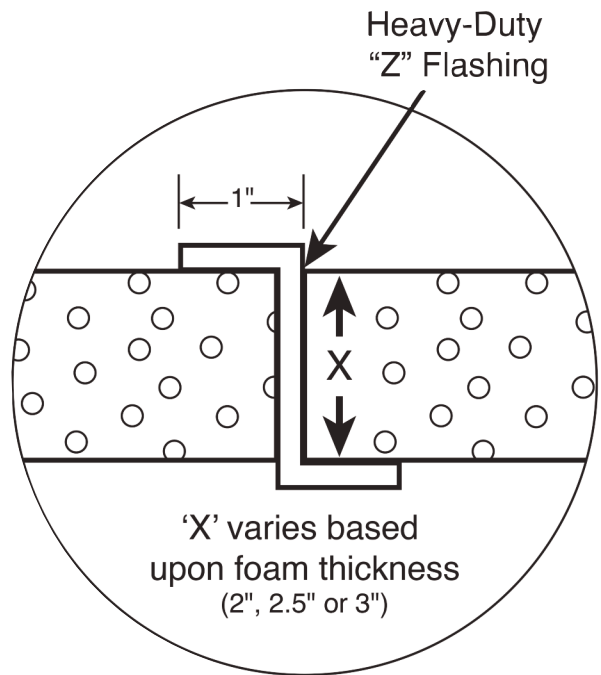

Product Number	Heavy Duty "Z" Flashing	Foam Thickness	Pieces per Box
SBZ1-2-1	1" x 2" x 1" (25 mm x 51 mm x 25 mm)	2"	15
SBZ1-2.5-1	1" x 2-1/2" x 1" (25 mm x 64 mm x 25 mm)	2-1/2"	15
SBZ1-3-1	1" x 3" x 1" (25 mm x 76 mm x 25 mm)	3"	15

10' (3 m) Lengths

Plastic Components' exterior trims are UV resistant, and manufactured of high-impact resistant, lead-free PVC compounds that meet ASTM standards D1784, D4216 and C1063 for exterior stucco, one coat, DEFS and EIFS applications, (and D3678 and C1047 for interior drywall.)

Distributed by

