

Direct Applied Finishes

Section: 07240

Control Joint with removable tape

| Product Number | Dimensions/Descriptions | Pieces per Box |
|----------------|---|----------------|
| PL0293 | Inverted 1/2" (13 mm) expansion joint. 1/16" (2 mm) finish top with removable tape. | 60 |
| PL0293-75 | Inverted 3/4" (19 mm) expansion joint with wide "V". 1/16" (2 mm) finish top with removable tape. | 60 |



10' (3 m) Lengths

Application:

Flexible PVC control joint designed specifically for DEFS systems. Perforated flanges are placed on top of separated sheets of sheathing with "V" placed in separated channel. May be used in vertical or horizontal applications. Has removable tape that protects 3/8" (10 mm) depth "V" groove during application; also provides a 1/2" (13 mm) reveal. Built-in stops ensure proper thickness of base and finish.

Specifications:

Control Joint shall be Plastic Components Inc. #_____. All exterior accessories shall conform to ASTM standards D-1784, C1063 and D4216. They shall be used where specified by the design authority and installed per industry standards.

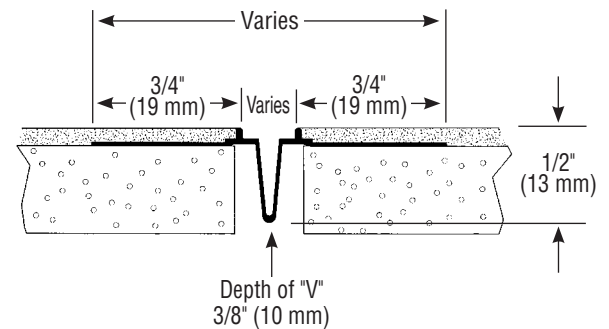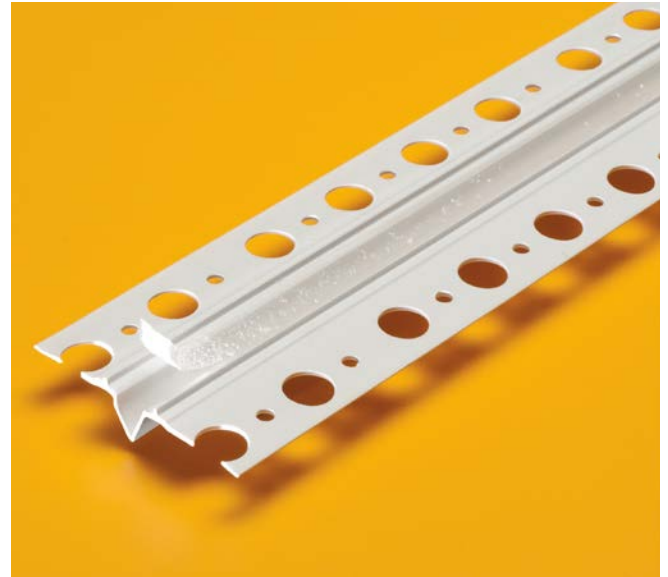

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.