1/4'

(6 mm)



Ultra Casing Bead


with Built-in Moisture Seal

Removes multiple steps from the building process

Plastic Components' Ultra Casing Bead features a built-in seal for improved water management in stucco and stone veneer applications.

And its red color makes inspections easier.


- · Creates consistent spacing around window/door frame
- · Helps keep moisture from entering around doors, windows and dissimilar claddings



1-3/4"

(44 mm)



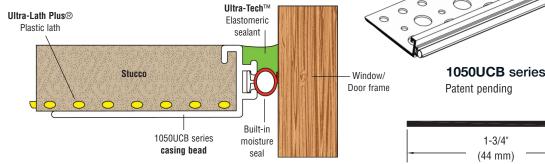

Tail design

allows for better seal

Ultra Casing Bead with Built-in Moisture Seal

Moisture

dam

Product Number	Ground	Color	Description	Flange Width	Pieces per Box
1050UCB	1/2" (13 mm)	White	Casing bead with built-in moisture seal 10 ft (3 m) Lengths	1-3/4" (44 mm) wide Perforated flange	75
1058UCB	5/8" (16 mm)				75
1075UCB	3/4" (19 mm)				75
1078UCB	7/8" (22 mm)				50
1100UCB	1" (25 mm)				50
1125UCB	1-1/4" (32 mm)				50
1150UCB	1-1/2" (38 mm)				50

		_		
Availa	hle i	n FNII	R CNI	NRS

For TAN add suffix TAN. Sample: 1050UCBTAN For GRAY add suffix GRAY. Sample: 1050UCBGRAY For DARK BROWN add suffix DB. Sample: 1050UCBDB





Plastic Components' exterior trims are UV resistant, and manufactured of high-impact resistant, lead-free PVC compounds that meet ASTM standards D1784 and C1063 (for exterior stucco, one coat, DEFS and EIFS applications), D1784 (for exterior stucco), and D3678 and C1047 (for interior drywall).