

Stone Veneer

Section: 09200

Ultra Casing Bead in Colors with Built-in Moisture Seal

Product Number	Ground	Color	Description	Flange Width	Pieces per Box
1050UCB	1/2" (13 mm)	White	Casing bead with built-in moisture seal	1-3/4" (44 mm) Perforated flange	75
1058UCB	5/8" (16 mm)				75
1075UCB	3/4" (19 mm)				75
1078UCB	7/8" (22 mm)				50
1100UCB	1" (25 mm)				50



Product Number	Ground	Color	Description	Flange Width	Pieces per Box
1050UCBTAN	1/2" (13 mm)	Tan	Casing bead with built-in moisture seal	1-3/4" (44 mm) Perforated flange	75
1058UCBTAN	5/8" (16 mm)				75
1075UCBTAN	3/4" (19 mm)				75
1078UCBTAN	7/8" (22 mm)				50
1100UCBTAN	1" (25 mm)				50

Product Number	Ground	Color	Description	Flange Width	Pieces per Box
1050UCBGRAY	1/2" (13 mm)	Gray	Casing bead with built-in moisture seal	1-3/4" (44 mm) Perforated flange	75
1058UCBGRAY	5/8" (16 mm)				75
1075UCBGRAY	3/4" (19 mm)				75
1078UCBGRAY	7/8" (22 mm)				50
1100UCBGRAY	1" (25 mm)				50

Product Number	Ground	Color	Description	Flange Width	Pieces per Box
1050UCBDB	1/2" (13 mm)	Dark Brown	Casing bead with built-in moisture seal	1-3/4" (44 mm) Perforated flange	75
1058UCBDB	5/8" (16 mm)				75
1075UCBDB	3/4" (19 mm)				75
1078UCBDB	7/8" (22 mm)				50
1100UCBDB	1" (25 mm)				50

10 ft (3 m) Lengths

Plastic Components' exterior trims are UV resistant, and manufactured of high-impact resistant, lead-free PVC compounds that meet ASTM standards D1784 and C1063 (for exterior stucco, one coat, DEFS and EIFS applications), D1784 (for exterior stucco), and D3678 and C1047 (for interior drywall).

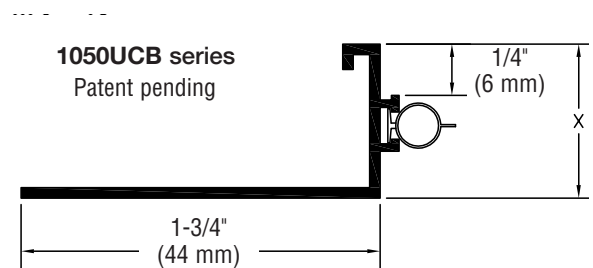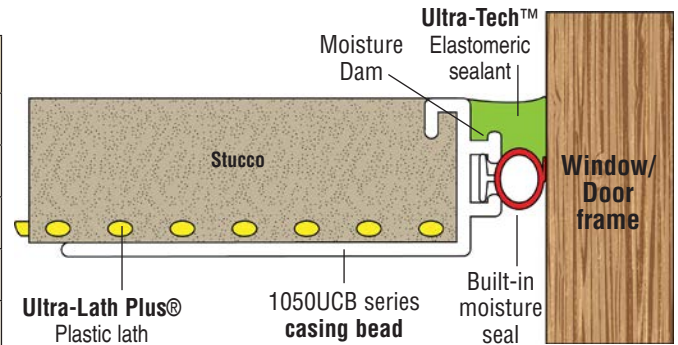

Application:

Plastic Components' Ultra Casing Bead features a built-in seal for improved water management in stucco and stone veneer applications. Creates consistent spacing around window/door frames, helps keep moisture from entering around doors, windows and other dissimilar claddings. Its easy to handle, UV rated and available in four colors, white, tan, gray and dark brown. And its red color makes inspections easier.

Specifications

Ultra Casing Bead shall be Plastic Components, Inc. #_____. All exterior accessories shall be of PVC material that meets ASTM D1784, C1063, C926, C1861 and D4216. They shall be used where specified by the design authority and installed per industry standards.

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).