



Plastic Components' Ultra Casing Bead, with 1-3/4" perforated back flange, features a built-in seal for improved water management in stone veneer applications and stucco. *And its RED color makes inspections easier.*

- Creates consistent spacing around window/door frame
- Helps keep moisture from entering around doors, windows and dissimilar claddings
- Easy to handle, UV rated
- Color trims eliminate painting in stone veneer projects

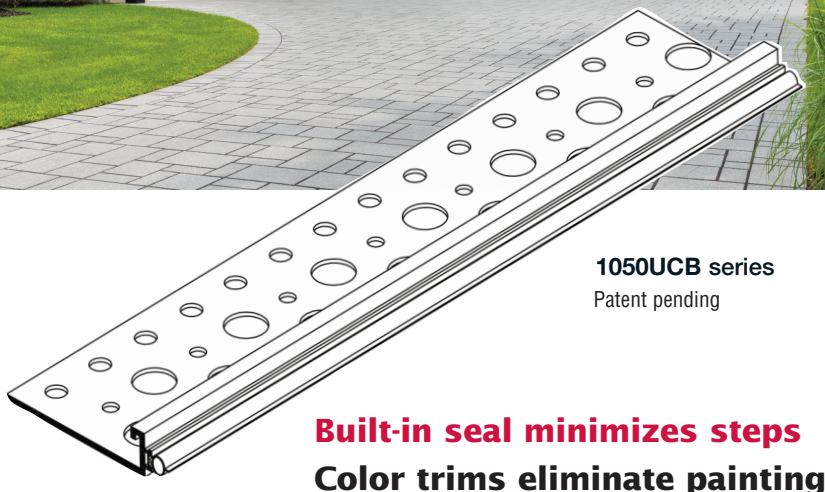

**Built-in seal minimizes steps**  
**Color trims eliminate painting**

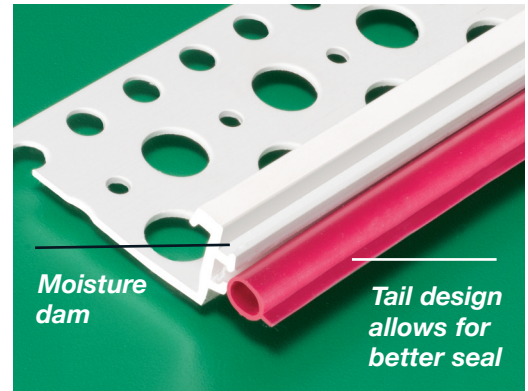

# Ultra Casing Bead in Colors

with Built-in Moisture Seal





Product Number	Ground	Color	Flange Width	Pieces per Box
1050UCB	1/2" (13 mm)	White	1-3/4" (44 mm) Perforated flange	75
1058UCB	5/8" (16 mm)			75
1075UCB	3/4" (19 mm)			75
1078UCB	7/8" (22 mm)			50
1100UCB	1" (25 mm)			50
1125UCB	1-1/4" (32 mm)			50
1150UCB	1-1/2" (38 mm)			50

Product Number	Ground	Color	Flange Width	Pieces per Box
1050UCBTAN	1/2" (13 mm)	Tan	1-3/4" (44 mm) Perforated flange	75
1058UCBTAN	5/8" (16 mm)			75
1075UCBTAN	3/4" (19 mm)			75
1078UCBTAN	7/8" (22 mm)			50
1100UCBTAN	1" (25 mm)			50
1125UCBTAN	1-1/4" (32 mm)			50
1150UCBTAN	1-1/2" (38 mm)			50

Product Number	Ground	Color	Flange Width	Pieces per Box
1050UCBGRAY	1/2" (13 mm)	Gray	1-3/4" (44 mm) Perforated flange	75
1058UCBGRAY	5/8" (16 mm)			75
1075UCBGRAY	3/4" (19 mm)			75
1078UCBGRAY	7/8" (22 mm)			50
1100UCBGRAY	1" (25 mm)			50
1125UCBGRAY	1-1/4" (32 mm)			50
1150UCBGRAY	1-1/2" (38 mm)			50

Product Number	Ground	Color	Flange Width	Pieces per Box
1050UCBDB	1/2" (13 mm)	Dark Brown	1-3/4" (44 mm) Perforated flange	75
1058UCBDB	5/8" (16 mm)			75
1075UCBDB	3/4" (19 mm)			75
1078UCBDB	7/8" (22 mm)			50
1100UCBDB	1" (25 mm)			50
1125UCBDB	1-1/4" (32 mm)			50
1150UCBDB	1-1/2" (38 mm)			50

10 ft (3 m) Lengths

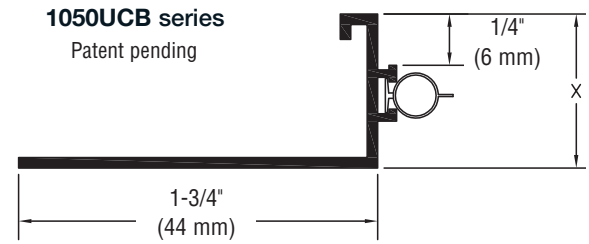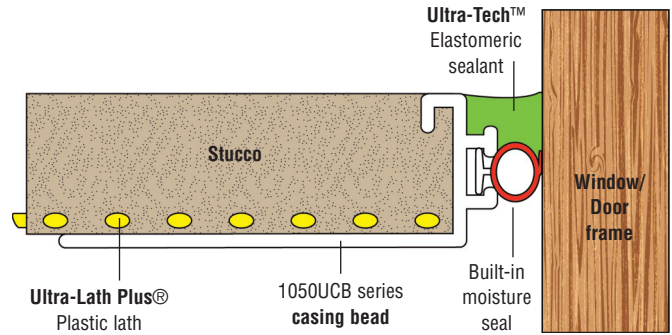

### Ultra-Tech™ Elastomeric Sealant

Ultra-Tech is the answer to reliable caulking of Plastic Components' PVC accessories. This high-performance gun-grade sealant, forms an airtight, water-resistant seal against moisture. It offers excellent adhesion and superior elongation.

- No 'shiners', paint discoloration
- Non-yellowing
- Mildew- and dirt-resistant
- Paintable, soap/water cleanup



Product Number	Ultra-Tech™ Gun-grade Sealant	(12) Tubes per Box
PC-ULTW	White, urethane-modified acrylic elastomeric sealant. 800% elongation.	10.1 oz (299 mL) each

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ elastomeric sealant with 800% elongation (PC-ULTW).

Plastic Components' exterior trims are UV resistant, and manufactured of high-impact resistant, lead-free PVC compounds that meet ASTM standards D1784 and C1063 (for exterior stucco, one coat, DEFS and EIFS applications), D1784 (for exterior stucco), and D3678 and C1047 (for interior drywall).



Distributed by

