



Made in the USA

Since 1969

PLASTIC **PC**TM COMPONENTS *inc.*

LinkedIn Facebook Instagram
follow us

PVC ACCESSORIES



632-138EL



Ultra
Casing Bead



1138-O
Old Style
Casing Bead



35138
Unpunched
Casing Bead

for Stucco/Plaster

Plastic Components

Florida-based **Plastic Components** is the originator and designer of many innovative trims, and since 1969, has manufactured quality plastic trims and accessories for the construction industry that solve problems created by standard metal.



Our nearly 700 line items include corner beads, control joints, vents, slip joints, reveals, and more for continuous insulation and exterior insulated finish systems (CI/EIFS), direct applied (DEFS), **stucco**, stone veneer and drywall.

From freezing cold to extreme heat, Plastic Components' PVC products deliver optimal results – good looks, easy handling, moisture management, reduced labor costs and superior field performance.



Our trims are tested and listed with Intertek Testing Services/Warnock Hersey to meet or exceed the strict standards set by ASTM.

PVC Trims for Stucco, Plaster are the rust-free, impact-resistant alternative to metal accessories. They trim and protect stucco while controlling expansion and contraction. And save time *and* money.

PLASTIC PCTM
COMPONENTS inc.



**PVC TRIMS FOR STUCCO/PLASTER
NON-RUSTING
PAINTABLE**



**MEET ASTM D4216,
D1784, C1861, C1063, C926**



| Product | Page No. |
|--|-----------------|
| CORNER BEAD | 3 |
| CASING BEADS | 3-4 |
| LAP SIDING STEP BEAD | 5 |
| SILL SCREEDS Weeped and Unweeped for Framing and Masonry..... | 5 |
| 'Z' FLASHING for Floor Line Applications.... | 5 |
| DRIP EDGE for Exterior Openings..... | 5 |
| FLOOR LINE CONTROL BEAD | 5 |
| CONTROL JOINTS | 6 |
| SLIP JOINTS/EXPANSION JOINTS | 7 |
| DRIP SCREED, SOFFIT DRIP | 7 |
| SOFFIT VENTS | 9 |
| ULTRA-TRAC™ CHANNEL REVEALS | 8 |
| Moisture Management Accessories | 10 |
| Ultra-Lath Plus® and Ultra-Lath™ NON-RUSTING PLASTIC LATH | |
| Ultra-Drain Mat™ DRAINAGE/VENTILATION SYSTEM | |
| Tower Tech2™ ELASTOMERIC SEALANT | |

Contact us at **800-327-7077** or **plasticcomponents.com** for assistance.

Manufacturers of PVC Accessories for Stucco/Plaster, CI/EIFS, DEFS & Drywall


Corner Bead in 8 and 10 ft Lengths

Ultra Casing Bead with Built-in Moisture Seal · 10 ft Lengths



Corner beads create damage-resistant, durable outside corners in stucco applications

- Rustproof PVC
- 8' and 10' ft (2.5 m and 3 m) Lengths
- Meets ASTM standards D4216, D1784, C1861, C1063, C926

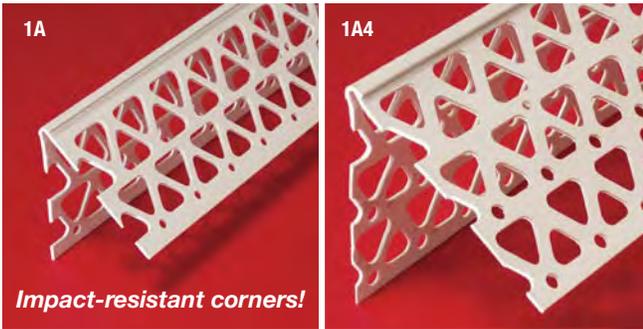

Corner Beads 8' and 10' (2.5 m and 3 m) Lengths

| PRODUCT NUMBER | DIMENSIONS | PIECES /BOX |
|----------------|---------------------------------|-------------|
| 1A | 2-1/2" x 2-1/2" (64 mm x 64 mm) | 50 |
| 1A4 | 4" x 4" (102 mm x 102 mm) | 30 |
| 3 | 2-1/2" x 1-1/2" (64 mm x 38 mm) | 50 |




Ultra Casing Bead in 10' (3 m) Lengths

Built-in moisture seal keeps water from entering around doors, windows and dissimilar claddings in stucco applications. Creates consistent spacing around window/door frames. Red colored seal for easier inspections.

| PRODUCT NUMBER | GROUND | ULTRA CASING BEAD DESCRIPTION | PIECES /BOX |
|----------------|----------------|-------------------------------|-------------|
| 1050UCB | 1/2" (13 mm) | 1-3/4" (44 mm) | 75 |
| 1058UCB | 5/8" (16 mm) | Perforated flange | 75 |
| 1075UCB | 3/4" (19 mm) | | 75 |
| 1078UCB | 7/8" (22 mm) | 10' (3 m) Lengths | 50 |
| 1100UCB | 1" (25 mm) | | 50 |
| 1125UCB | 1-1/4" (32 mm) | White | 50 |
| 1150UCB | 1-1/2" (38 mm) | | 50 |

Also available in Tan, Gray and Dark Brown for Stone Veneer

- For Tan add suffix TAN. Sample: 1050UCBTAN
- For Gray add suffix GRAY. Sample: 1050UCBGRAY
- For Dark Brown add suffix DB. Sample: 1050UCBDB

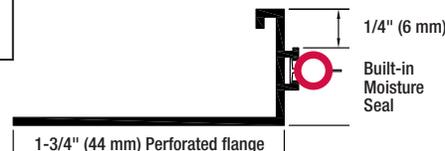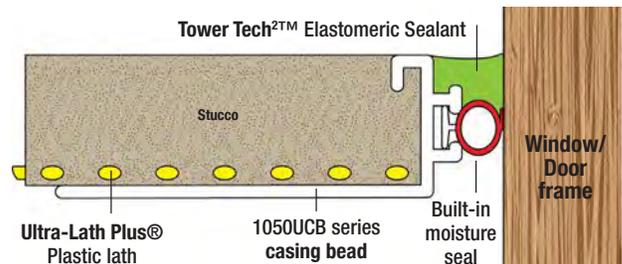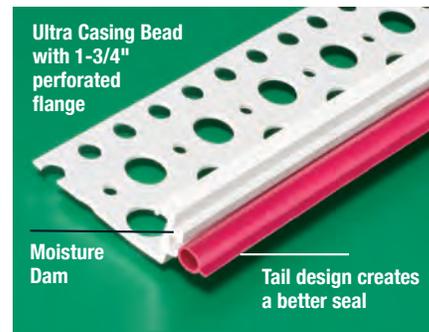

UER #0284

9051 NW 97 Terrace • Miami, Florida 33178 • 305/885-0561 • 800/327-7077 • FAX 305/887-2452

Casing Beads Stop or Termination Beads

UV Resistant · Improved Moisture Management · 10 ft Lengths



| PRODUCT NUMBER | GROUND | PRODUCT DETAIL/ FLANGE WIDTH | PIECES /BOX |
|--|----------------|---------------------------------|----------------|
| Standard Flange Casing Bead Weeped or Unweeped | | | |
| <i>Add suffix 'WP' for weep holes: 1038WP.</i> | | | |
| <i>1/4" 1025 cannot be weeped.</i> | | | |
| 1025 | 1/4" (6 mm) | | 75 |
| 1038 | 3/8" (10 mm) | | 75 |
| 1050 | 1/2" (13 mm) | 1-3/4" (44 mm) | 75 |
| 1058 | 5/8" (16 mm) | Perforated standard flange | 75 |
| 1075 | 3/4" (19 mm) | | 75 |
| 1078 | 7/8" (22 mm) | | 75 |
| Casing Bead with 3/8" Spacing Flange | | | |
| 1050SF | 1/2" (13 mm) | Maintains consistent | 75 |
| 1058SF | 5/8" (16 mm) | 3/8" (10 mm) spacing | 75 |
| 1075SF | 3/4" (19 mm) | around window/door frame | 75 |
| 1078SF | 7/8" (22 mm) | for addition of | 75 |
| 1100SF | 1" (25 mm) | backer rod and sealant | 50 |
| 1125SF | 1-1/4" (32 mm) | | 50 |
| 1150SF | 1-1/2" (38 mm) | 1-3/4" (44 mm) | 50 |
| 1200SF | 2" (51 mm) | Perforated flange | 40 |
| 'T' Bar Casing Bead Extra-strong casing bead | | | |
| 1100 | 1" (25 mm) | | 50 |
| 1125 | 1-1/4" (32 mm) | 1-3/4" (44 mm) | 50 |
| 1150 | 1-1/2" (38 mm) | Perforated flange | 50 |
| 1200 | 2" (51 mm) | | 40 |
| Channel Casing Bead Quick, better quality installations. Straight. More consistent than butting two separate beads together. | | | |
| 1150250-CCB | 2-1/2" (64 mm) | 1-1/2" (38 mm) width | 15 |
| 1200100-CCB | 1" (25 mm) | 2" (51 mm) width | 15 |
| 1200150-CCB | 1-1/2" (38 mm) | 2" (51 mm) width | 15 |
| 1200200-CCB | 2" (51 mm) | 2" (51 mm) width | 15 |

| PRODUCT NUMBER | GROUND | PRODUCT DETAIL/ FLANGE WIDTH | PIECES /BOX |
|--|----------------|---------------------------------|----------------|
| Casing Bead with 5" Flange | | | |
| 1050XL | 1/2" (13 mm) | | 40 |
| 1058XL | 5/8" (16 mm) | 5" (127 mm) | 40 |
| 1075XL | 3/4" (19 mm) | Perforated flange | 40 |
| 1078XL | 7/8" (22 mm) | | 40 |
| Arch Casing Bead the easy way to make arches | | | |
| 1050A | 1/2" (13 mm) | | 75 |
| 1058A | 5/8" (16 mm) | 1-3/4" (44 mm) | 75 |
| 1075A | 3/4" (19 mm) | Perforated flange | 75 |
| 1078A | 7/8" (22 mm) | | 75 |
| 1100-O-A | 1" (25 mm) | | 50 |
| Unpunched Casing Bead Weeped or Unweeped | | | |
| <i>Add suffix 'WP' for weep holes. Example: 3550WP</i> | | | |
| 3550 | 1/2" (13 mm) | | 40 |
| 3558 | 5/8" (16 mm) | 3-1/2" (89 mm) | 40 |
| 3575 | 3/4" (19 mm) | Unpunched flange | 40 |
| 3578 | 7/8" (22 mm) | | 40 |
| 35100 | 1" (25 mm) | | 40 |
| 35138 | 1-3/8" (35 mm) | for 1-3/8" (35 mm) ground | 40 |
| Casing Bead for Windows, Doors | | | |
| 1050-58 | 1/2" (13 mm) | 5/8" (16 mm) back flange | 50 |
| 1058-50 | 5/8" (16 mm) | 1/2" (13 mm) back flange | 50 |
| 1058-58 | 5/8" (16 mm) | 5/8" (16 mm) back flange | 50 |
| 1058-75 | 5/8" (16 mm) | 3/4" (19 mm) back flange | 50 |
| 1058-78 | 5/8" (16 mm) | 7/8" (22 mm) back flange | 50 |
| 1078-50 | 7/8" (22 mm) | 1/2" (13 mm) back flange | 50 |
| 1078-58 | 7/8" (22 mm) | 5/8" (16 mm) back flange | 50 |
| Critter Control™ Casing Bead with Weeped Ground | | | |
| 1058-50WP | 5/8" (16 mm) | 1/2" (13 mm) back flange | 50 |
| 1078-50WP | 7/8" (22 mm) | 1/2" (13 mm) back flange | 50 |
| 1058-58WP | 5/8" (16 mm) | 5/8" (16 mm) back flange | 50 |
| 1078-58WP | 7/8" (22 mm) | 5/8" (16 mm) back flange | 50 |

PLASTIC PC™
COMPONENTS inc.

Caulk all butt joints, intersections and ends at the time of installation with an elastomeric sealant, such as Plastic Components' Tower Tech²™ (PC-TS00215).



Manufacturers of PVC Accessories for Stucco/Plaster, CI/EIFS, DEFS & Drywall

UER #0284

PVC Trims for Stucco/Plaster

UV Resistant · Non-Rusting · 10 ft Lengths



PVC trims deliver better-looking results and move moisture out and away from the structure.

- Moisture management drip edges and screeds
- Lap Siding Bead simulates the look of siding with stucco
- 10' (3 m) Lengths
- Meets ASTM standards D4216, D1784, C1861, C1063, C926



| PRODUCT NUMBER | GROUND | PRODUCT DETAIL/ FLANGE DIM | PIECES BOX |
|---|-----------------------------|---|---------------|
| Floor Line Control Bead w/ Drip Edge | | | |
| 2078-50 | 7/8" (22 mm) x 1/2" (13 mm) | 3-1/2" | 15 |
| 2078-58 | 7/8" (22 mm) x 5/8" (16 mm) | (89 mm) | 15 |
| 2078-78 | 7/8" (22 mm) x 7/8" (22 mm) | Unpunched | 15 |
| 2078-78UP | 7/8" (22 mm) x 7/8" (22 mm) | flange | 15 |
| Drip Edge for Exterior Openings | | | |
| 1075DE | 3/4" (19 mm) | 1-3/4" (44 mm) back flange | 100 |
| 1078DE | 7/8" (22 mm) | minimizes moisture intrusion at exterior openings | 100 |

| PRODUCT NUMBER | GROUND | FLANGE WIDTH | PIECES /BOX |
|--|-----------------------------|--------------|----------------|
| Lap Siding Step Bead w/ Striated Flange | | | |
| SSB 75-50 | 3/4" (19 mm) x 1/2" (13 mm) | 2" (51 mm) | 50 |
| SSB 78-50 | 7/8" (22 mm) x 5/8" (16 mm) | 2" (51 mm) | 50 |
| SSB 100-50 | 1" (25 mm) x 1/2" (13 mm) | 2" (51 mm) | 50 |
| SSB 100-58 | 1" (25 mm) x 5/8" (16 mm) | 2" (51 mm) | 50 |



| PRODUCT NUMBER | DRIP EDGE DIMENSION | BOARD THICKNESS | PIECES BOX |
|---|---------------------|-----------------|---------------|
| 'Z' Flashing for Floor Line · 3" (76 mm) Back Flange | | | |
| SBZ-50 | 1/2" (13 mm) | 1/2" (13 mm) | 30 |
| SBZ-58 | 1/2" (13 mm) | 5/8" (16 mm) | 30 |
| SBZ-75 | 1/2" (13 mm) | 3/4" (19 mm) | 30 |
| SBZ-78 | 1/2" (13 mm) | 7/8" (16 mm) | 30 |

| PRODUCT NUMBER | GROUND | PRODUCT DETAIL/ FLANGE WIDTH | PIECES /BOX |
|---|----------------|---------------------------------|----------------|
| Sill Screeds Weeped or Unweeped Unperforated for Framing | | | |
| <i>Add suffix 'WP' for weep holes. Example: 632-50WP</i> | | | |
| <i>Add suffix 'SL' for short leg. Example: 632-50SL</i> | | | |
| 632-38 | 3/8" (10 mm) | No holes in stop (632-38) | 35 |
| 632-50 | 1/2" (13 mm) | | 35 |
| 632-58 | 5/8" (16 mm) | 3-1/2" (89 mm) | 35 |
| 632-75 | 3/4" (19 mm) | Unperforated flange | 35 |
| 632-78 | 7/8" (22 mm) | | 30 |
| 632-100 | 1" (25 mm) | | 25 |
| 632-138 | 1-3/8" (35 mm) | | 30 |
| 632-50EL | 1/2" (13 mm) | with 1/2" Extended Leg | 30 |
| 632-78EL | 7/8" (22 mm) | to accommodate sheathing | 30 |
| 632-138EL | 1-3/8" (35 mm) | | 30 |

| PRODUCT NUMBER | GROUND | PRODUCT DETAIL/ FLANGE WIDTH | PIECES /BOX |
|---|--------------|---------------------------------|----------------|
| Sill Screeds Weeped or Unweeped Perforated for Masonry | | | |
| <i>Add suffix "WP" for weep holes. Example: 631-50WP</i> | | | |
| 631-50 | 1/2" (13 mm) | | 35 |
| 631-58 | 5/8" (16 mm) | 2-1/2" (64 mm) | 35 |
| 631-75 | 3/4" (19 mm) | Perforated flange | 35 |
| 631-78 | 7/8" (22 mm) | | 35 |




Caulk all butt joints, intersections and ends at the time of installation with an elastomeric sealant, such as Plastic Components' Tower Tech²™ (PC-TS00215).

9051 NW 97 Terrace · Miami, Florida 33178 · 305/885-0561 · 800/327-7077 · FAX 305/887-2452

www.plasticcomponents.com · orders@plasticcomponents.com

Control Joints for Stucco/Plaster

Paintable · 10 ft (3 m) Lengths · Non-Rusting

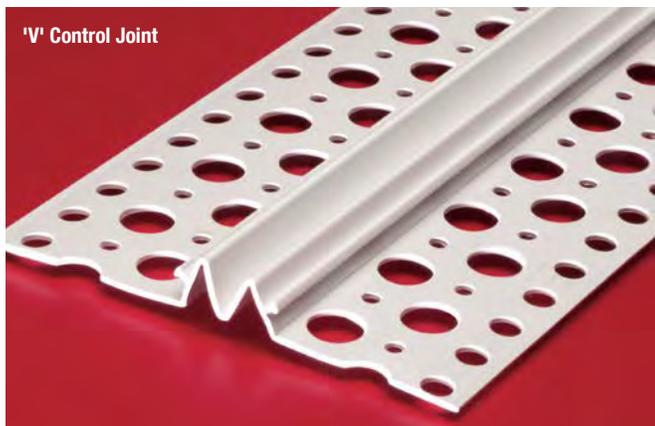

'V' Control Joint

Crack control at its best!

- Control joints help to prevent cracks in stucco caused by thermal expansion and contraction
- Serves as a screed to ensure stucco depth
- Works as stop/start point to reduce cold joints
- 10' (3 m) Lengths
- Meets ASTM standards
D4216, D1784, C1861, C1063, C926



'V' Control Joint

| PRODUCT NUMBER | GROUND | PRODUCT DETAIL/ FLANGE | PIECES /BOX |
|----------------|--------------|-------------------------------|-------------|
| 2038 | 3/8" (10 mm) | 'V' Control Joint | 35 |
| 2050 | 1/2" (13 mm) | overall width 4-1/8" (105 mm) | 35 |
| 2058 | 5/8" (16 mm) | 3/8" (10 mm) reveal | 35 |
| 2075 | 3/4" (19 mm) | Perforated flanges | 30 |
| 2078 | 7/8" (22 mm) | | 25 |
| 2100 | 1" (25 mm) | Connector clips included | 20 |

'M' Control Joint

| PRODUCT NUMBER | GROUND | PRODUCT DETAIL/ FLANGE | PIECES /BOX |
|----------------|--------------|---|-------------|
| 2025 | 1/4" (6 mm) | 3/4" (19 mm) 'M' Control Joint | 50 |
| 2138XS | 3/8" (10 mm) | 1/4" (6 mm) reveal Removable tape · Perforated flanges | 50 |
| 2150X | 1/2" (13 mm) | 1/2" (13 mm) 'M' Control Joint | 40 |
| 2158X | 5/8" (16 mm) | 1/4" (6 mm) reveal | 40 |
| 2175X | 3/4" (19 mm) | Removable tape | 30 |
| 2178X | 7/8" (22 mm) | Larger perforated flanges, | 30 |
| 2100X | 1" (25 mm) | with two rows of holes | 20 |

To order 'F' series add prefix 'F' before the product number: F2150X

Inside Corner Control Joint

| PRODUCT NUMBER | GROUND | PRODUCT DETAIL | PIECES /BOX |
|----------------|--------------|----------------|-------------|
| 2050IC | 1/2" (13 mm) | | 35 |
| 2058IC | 5/8" (16 mm) | Inside corner | 35 |
| 2075IC | 3/4" (19 mm) | control joint | 30 |
| 2078IC | 7/8" (22 mm) | | 30 |




'M' Control Joint



'M' Control Joint

'F' series

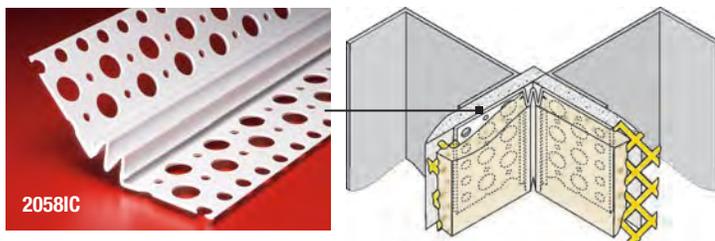

2058IC



Caulk all butt joints, intersections and ends at the time of installation with an elastomeric sealant, such as Plastic Components' Tower Tech²™ (PC-TS00215).



UER #0284

PLASTIC PCTM
COMPONENTS inc.

Manufacturers of PVC Accessories for Stucco/Plaster, CI/EIFS, DEFS & Drywall

Slip Joint/Expansion Joint • Soffit Accessories

10 ft (3 m) Lengths • Non-Rusting





Here's the non-rusting, paintable alternative to metal expansion joints

- Helps to relieve stress on building materials caused by building movement
- Multiple styles
- 10' (3 m) Lengths
- Meets ASTM standards D4216, D1784, C1861, C1063, C926




Soffit Drip Screenshot

| PRODUCT NUMBER | GROUND | PRODUCT DETAIL/ DIMENSIONS | PIECES /BOX |
|----------------|--------------|-------------------------------|-------------|
| 540-50 | 1/2" (13 mm) | 2" x 2" perforated flange | 15 |
| 540-58 | 5/8" (16 mm) | (51 mm x 51 mm) | 15 |
| 540-75 | 3/4" (19 mm) | | 15 |
| 540-78 | 7/8" (22 mm) | Ships Unassembled | 15 |




'W' Soffit Drip

| PRODUCT NUMBER | GROUND | PRODUCT DETAIL | PIECES /BOX |
|----------------|--------------|-----------------------|-------------|
| 540M-25 | 1/4" (6 mm) | | 50 |
| 540M-38 | 3/8" (10 mm) | Forms 'W' portion | 60 |
| 540M-50 | 1/2" (13 mm) | of soffit drip | 50 |
| 540M-58 | 5/8" (16 mm) | | 50 |
| 540M-75 | 3/4" (19 mm) | One Perforated flange | 50 |
| 540M-78 | 7/8" (22 mm) | | 50 |

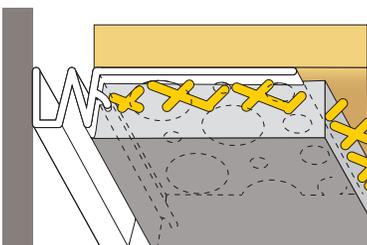

Slip Joint/Expansion Joint • Inside/Outside Corner

| PRODUCT NUMBER | GROUND | PRODUCT DETAIL/ DIMENSIONS | PIECES /BOX |
|----------------|--------------|--|-------------|
| 2079 | 3/8" (10 mm) | 1/2" (13 mm) Reveal | 25 |
| 2080 | 1/2" (13 mm) | adjusts from 0" to 1/2" (0 to 13 mm) | 25 |
| 2083 | 5/8" (16 mm) | 2" x 2" (51 mm x 51 mm) flange | 25 |
| 2081 | 3/4" (19 mm) | | 30 |
| 2082 | 7/8" (22 mm) | Ships Unassembled | 20 |
| 501-50 | 1/2" (13 mm) | 1" (25 mm) Reveal adjusts from | 20 |
| 501-58 | 5/8" (16 mm) | 3/4" to 1-1/8" (19 mm to 29 mm) | 20 |
| 501-75 | 3/4" (19 mm) | 1" x 1" (25 mm x 25 mm) flange | 20 |
| | | Ships Unassembled | |
| 500-50 | 1/2" (13 mm) | 1-1/2" (38 mm) Reveal | 15 |
| 500-58 | 5/8" (16 mm) | adjusts from 1-1/4" to 1-5/8" | 15 |
| 500-75 | 3/4" (19 mm) | (32 mm to 41 mm) | 15 |
| | | 1-1/2" x 1-1/2" (38 mm x 38 mm) flange | |
| | | Ships Unassembled | |
| 502-75 | 3/4" (19 mm) | 3" (76 mm) Reveal adjusts from | 10 |
| | | 2-1/8" to 2-5/8" (54 to 67 mm) | |
| | | 3" x 3" (76 x 76 mm) flange | |
| 511-38 | 3/8" (10 mm) | Inside/Outside Corner | 15 |
| 511-50 | 1/2" (13 mm) | adjusts from 3/4" to 1" | 15 |
| 511-58 | 5/8" (16 mm) | (19 mm to 25 mm) | 15 |
| 511-75 | 3/4" (19 mm) | | 15 |
| 511-78 | 7/8" (22 mm) | Ships Unassembled | 12 |



9051 NW 97 Terrace • Miami, Florida 33178 • 305/885-0561 • 800/327-7077 • FAX 305/887-2452

www.plasticcomponents.com • orders@plasticcomponents.com

Ultra-Trac™ Aesthetic Stucco Channel Reveals

Multiple Styles · Rustproof · 10 ft (3 m) Lengths



The easy way to create attractive architectural detail in stucco systems

- 'V' Profile available as a Custom Order with 10 box minimum
- Meets ASTM standards D4216, D1784, C1861, C1063, C926



Ultra-Trac™ Aesthetic Channel Reveal • 700 series

| PRODUCT NUMBER | REVEAL SIZE | PRODUCT DETAIL/ GROUND | PIECES /BOX |
|----------------|----------------|------------------------|-------------|
| 707-25 | | 1/4" (6 mm) | 35 |
| 707-38 | | 3/8" (10 mm) | 35 |
| 707-50 | 1/2" | 1/2" (13 mm) | 35 |
| 707-58 | (13 mm) | 5/8" (16 mm) | 35 |
| 707-75 | | 3/4" (19 mm) | 30 |
| 707-78 | | 7/8" (22 mm) | 30 |
| ----- | | | |
| 708-25 | | 1/4" (6 mm) | 50 |
| 708-38 | | 3/8" (10 mm) | 35 |
| 708-50 | 3/4" | 1/2" (13 mm) | 35 |
| 708-58 | (19 mm) | 5/8" (16 mm) | 30 |
| 708-75 | | 3/4" (19 mm) | 30 |
| 708-78 | | 7/8" (22 mm) | 30 |
| ----- | | | |
| 709-25 | | 1/4" (6 mm) | 50 |
| 709-38 | | 3/8" (10 mm) | 35 |
| 709-50 | 1" | 1/2" (13 mm) | 20 |
| 709-58 | (25 mm) | 5/8" (16 mm) | 20 |
| 709-75 | | 3/4" (19 mm) | 20 |
| 709-78 | | 7/8" (22 mm) | 20 |
| ----- | | | |
| 710-25 | | 1/4" (6 mm) | 50 |
| 710-38 | | 3/8" (10 mm) | 35 |
| 710-50 | 1-1/2" | 1/2" (13 mm) | 20 |
| 710-58 | (38 mm) | 5/8" (16 mm) | 20 |
| 710-75 | | 3/4" (19 mm) | 50 |
| 710-78 | | 7/8" (22 mm) | 35 |
| ----- | | | |
| 711-25 | | 1/4" (6 mm) | 40 |
| 711-38 | | 3/8" (10 mm) | 35 |
| 711-50 | 2" | 1/2" (13 mm) | 20 |
| 711-58 | (51 mm) | 5/8" (16 mm) | 20 |
| 711-75 | | 3/4" (19 mm) | 20 |
| ----- | | | |
| 712-50 | | 1/2" (13 mm) | 13 |
| 712-58 | 2-1/2" (64 mm) | 5/8" (16 mm) | 13 |
| 712-75 | | 3/4" (19 mm) | 13 |
| ----- | | | |
| 713-50 | | 1/2" (13 mm) | 13 |
| 713-58 | 3" (76 mm) | 5/8" (16 mm) | 13 |
| 713-75 | | 3/4" (19 mm) | 13 |
| ----- | | | |
| 714-50 | | 1/2" (13 mm) | 13 |
| 714-58 | 4" | 5/8" (16 mm) | 13 |
| 714-75 | (102 mm) | 3/4" (19 mm) | 13 |
| 714-78 | | 7/8" (22 mm) | 13 |

Ultra-Trac™ Aesthetic 'F' Channel Reveal

| PRODUCT NUMBER | REVEAL SIZE | PRODUCT DETAIL/ GROUND | PIECES /BOX |
|----------------|----------------|------------------------|-------------|
| F707-25 | | 1/4" (6 mm) | 35 |
| F707-38 | | 3/8" (10 mm) | 30 |
| F707-50 | 1/2" | 1/2" (13 mm) | 35 |
| F707-58 | (13 mm) | 5/8" (16 mm) | 35 |
| F707-75 | | 3/4" (19 mm) | 30 |
| F707-78 | | 7/8" (22 mm) | 30 |
| ----- | | | |
| F708-25 | | 1/4" (6 mm) | 50 |
| F708-38 | | 3/8" (10 mm) | 35 |
| F708-50 | 3/4" | 1/2" (13 mm) | 35 |
| F708-58 | (19 mm) | 5/8" (16 mm) | 30 |
| F708-75 | | 3/4" (19 mm) | 30 |
| F708-78 | | 7/8" (22 mm) | 30 |
| ----- | | | |
| F709-25 | | 1/4" (6 mm) | 50 |
| F709-38 | | 3/8" (10 mm) | 35 |
| F709-50 | 1" | 1/2" (13 mm) | 20 |
| F709-58 | (25 mm) | 5/8" (16 mm) | 20 |
| F709-75 | | 3/4" (19 mm) | 20 |
| F709-78 | | 7/8" (22 mm) | 20 |
| ----- | | | |
| F710-25 | | 1/4" (6 mm) | 50 |
| F710-38 | | 3/8" (10 mm) | 35 |
| F710-50 | 1-1/2" | 1/2" (13 mm) | 20 |
| F710-58 | (38 mm) | 5/8" (16 mm) | 20 |
| F710-75 | | 3/4" (19 mm) | 20 |
| F710-78 | | 7/8" (22 mm) | 20 |
| ----- | | | |
| F711-25 | | 1/4" (6 mm) | 40 |
| F711-38 | | 3/8" (10 mm) | 35 |
| F711-50 | 2" | 1/2" (13 mm) | 20 |
| F711-58 | (51 mm) | 5/8" (16 mm) | 20 |
| F711-75 | | 3/4" (19 mm) | 20 |
| ----- | | | |
| F712-50 | | 1/2" (13 mm) | 13 |
| F712-58 | 2-1/2" (64 mm) | 5/8" (16 mm) | 13 |
| F712-75 | | 3/4" (19 mm) | 13 |
| ----- | | | |
| F713-50 | | 1/2" (13 mm) | 13 |
| F713-58 | 3" (76 mm) | 5/8" (16 mm) | 13 |
| F713-75 | | 3/4" (19 mm) | 13 |
| ----- | | | |
| F714-50 | | 1/2" (13 mm) | 13 |
| F714-58 | 4" | 5/8" (16 mm) | 13 |
| F714-75 | (102 mm) | 3/4" (19 mm) | 13 |
| F714-78 | | 7/8" (22 mm) | 13 |

9051 NW 97 Terrace • Miami, Florida 33178 • 305/885-0561 • 800/327-7077 • FAX 305/887-2452

Soffit Vents for Stucco

Various Vented Area Sizes · Non-Rusting



Our non-rusting PVC continuous soffit vents allow air to move in and out of the attic, preventing moisture and heat build-up under the roof.

- Optimal hole size for increased airflow, while keeping insects, pests out of attic
- 10' (3 m) Lengths
- Meets ASTM standards
D4216, D1784, C1861, C1063, C926



2-piece Continuous Soffit Vents

| PRODUCT NUMBER | VENT AREA | AIR FLOW PER LINEAR FT | REVEAL/ GROUND | PIECES /BOX |
|----------------|-----------|------------------------|----------------|-------------|
| F549-50 WF551 | | | 1/2" (13 mm) | 13 |
| F549-58 WF551 | 2-3/8" | 14 sq in | 5/8" (16 mm) | 13 |
| F549-75 WF551 | (60 mm) | (9,033 sq mm) | 3/4" (19 mm) | 13 |
| F549-78 WF551 | | | 7/8" (22 mm) | 13 |
| | | | | |
| F3549-50 WF551 | | | 1/2" (13 mm) | 13 |
| F3549-58 WF551 | 3" | 15 sq in | 5/8" (16 mm) | 13 |
| F3549-75 WF551 | (76 mm) | (9,678 sq mm) | 3/4" (19 mm) | 13 |
| F3549-78 WF551 | | | 7/8" (22 mm) | 13 |
| | | | | |
| F4549-50 WF551 | | | 1/2" (13 mm) | 13 |
| F4549-58 WF551 | 4" | 16 sq in | 5/8" (16 mm) | 13 |
| F4549-75 WF551 | (102 mm) | (10,323 sq mm) | 3/4" (19 mm) | 13 |
| F4549-78 WF551 | | | 7/8" (22 mm) | 13 |


Ships unassembled • Reversible 90° leg
Connector clips included



2-piece Continuous Soffit Vent



'F' series



3300



301

Continuous Soffit Vents • 'F' series

| PRODUCT NUMBER | VENT AREA | AIR FLOW PER LINEAR FT | REVEAL/ GROUND | PIECES /BOX |
|----------------|-----------|------------------------|----------------|-------------|
| F549-50 | | | 1/2" (13 mm) | 13 |
| F549-58 | 2-3/8" | 14 sq in | 5/8" (16 mm) | 13 |
| F549-75 | (60 mm) | (9,033 sq mm) | 3/4" (19 mm) | 13 |
| F549-78 | | | 7/8" (22 mm) | 13 |
| | | | | |
| F3549-50 | | | 1/2" (13 mm) | 13 |
| F3549-58 | 3" | 15 sq in | 5/8" (16 mm) | 13 |
| F3549-75 | (76 mm) | (9,678 sq mm) | 3/4" (19 mm) | 13 |
| F3549-78 | | | 7/8" (22 mm) | 13 |
| | | | | |
| F4549-50 | | | 1/2" (13 mm) | 13 |
| F4549-58 | 4" | 16 sq in | 5/8" (16 mm) | 13 |
| F4549-75 | (102 mm) | (10,323 sq mm) | 3/4" (19 mm) | 13 |
| F4549-78 | | | 7/8" (22 mm) | 13 |
| | | | | |
| F6549-50 | 6" | 18 sq in | 1/2" (13 mm) | 10 |
| F6549-75 | (152 mm) | (11,614 sq mm) | 3/4" (19 mm) | 10 |

Connector clips included

Continuous Soffit Vents

| PRODUCT NUMBER | VENT AREA | AIR FLOW PER LINEAR FT | REVEAL/ GROUND | PIECES /BOX |
|----------------|-------------------|----------------------------|-----------------|-------------|
| 300 | 2-5/8" (67 mm) | 14 sq in (9,033 sq mm) | 3/8" (10 mm) | 50 |
| 301 | 1-3/4" (44 mm) | 7 sq in (4,516 sq mm) | 3/8" (10 mm) | 50 |
| 3300 | 3" (76 mm) | 15 sq in (9,678 sq mm) | 3/8" (10 mm) | 35 |
| 4300 | 4" (102 mm) | 16 sq in (10,323 sq mm) | 3/8" (10 mm) | 35 |
| 6300 | 6" (152 mm) | 18 sq in (11,614 sq mm) | 3/8" (10 mm) | 30 |

9051 NW 97 Terrace • Miami, Florida 33178 • 305/885-0561 • 800/327-7077 • FAX 305/887-2452

ACCESSORIES for Stucco/Plaster Applications

Manage moisture. Get a better, rustproof installation.



Rustproof Plastic Lath

Ultra-Lath Plus® 1/4" self-furred in sheets, rolls and strips.

Meets ASTM • COMPLIES with Florida Building Code

| PRODUCT NUMBER | ULTRA-LATH PLUS® NON-RUSTING PLASTIC LATH | |
|---------------------------------------|--|-------------------|
| 1/4" SELF-FURRED • Fire-tested | | |
| PDM2796-25 | SHEETS 27" x 96" (686 mm x 2.4 m) PACKAGING 10 sheets per bundle 180 sq ft (16.8 m ²) per bundle QTY PER PALLET 20 bundles per pallet 3,600 sq ft (334.5 m ²) per bundle | |
| PDM2796PB-25 | Asphalt Impregnated PAPER-BACKED SHEETS 27" x 96" (686 mm x 2.4 m) PACKAGING 10 sheets per bundle 180 sq ft (16.8 m ²) per bundle QTY PER PALLET 20 bundles per pallet 3,600 sq ft (334.5 m ²) per bundle | |
| PDMR-25 | ROLLS 27" x 75' (686 mm x 22.9 m) PACKAGING 168 sq ft (15.6 m ²) per roll QTY PER PALLET 18 rolls per pallet 3,024 sq ft (281 m ²) per pallet | |
| STRIP-LATH™ | STRIPS of Ultra-Lath Plus | PIECES/BOX |
| PDM3-25 | 3" (76 mm) w x 96" (2.4 m) | 50 |
| PDM4-25 | 4" (102 mm) w x 96" (2.4 m) | 50 |
| PDM6-25 | 6" (152 mm) w x 96" (2.4 m) | 50 |
| PDM8-25 | 8" (203 mm) w x 96" (2.4 m) | 35 |

| PRODUCT NUMBER | ULTRA-LATH® NON-RUSTING PLASTIC LATH | |
|---|---|-------------------|
| 1/8" SELF-FURRED • for One-Coat Stucco | | |
| PDM2796 | SHEETS 27" x 96" (686 mm x 2.4 m) PACKAGING 10 sheets per bundle 180 sq ft (16.8 m ²) per bundle QTY PER PALLET 25 bundles per pallet 4,500 sq ft (418 m ²) per bundle | |
| PDMR | ROLLS 27" x 100' (686 mm x 30.5 m) PACKAGING 225 sq ft (21 m ²) per roll QTY PER PALLET 18 bundles per pallet 4,050 sq ft (376.25 m ²) per pallet | |
| STRIP-LATH™ | STRIPS of Ultra-Lath | PIECES/BOX |
| PDM3 | 3" (76 mm) w x 96" (2.4 m) | 50 |
| PDM4 | 4" (102 mm) w x 96" (2.4 m) | 50 |
| PDM6 | 6" (152 mm) w x 96" (2.4 m) | 50 |
| PDM8 | 8" (203 mm) w x 96" (2.4 m) | 50 |

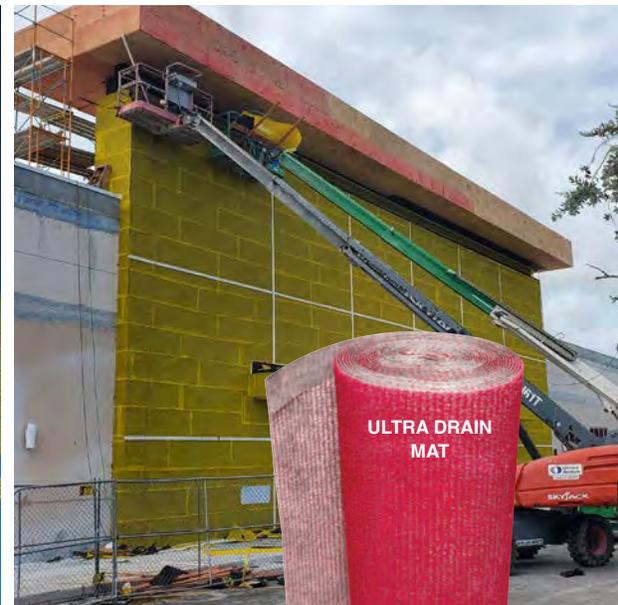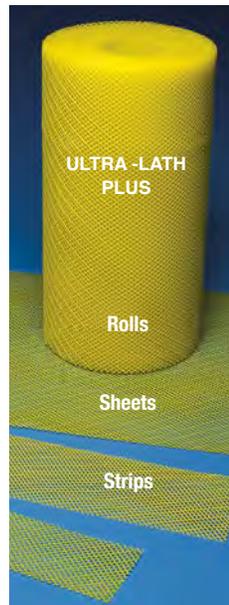

Ultra Drain Mat™ Drainage Mat, Ventilation System

| PRODUCT NUMBER | THICKNESS | ROLL DIMENSION/ COVERAGE | ROLLS/PALLET |
|-------------------------|--------------|---|--------------|
| ULTRA DRAIN MAT™ | | | |
| UDM-25 | .25" (6 mm) | 39" x 61.5' (99 cm x 18.75 m) 200 sf (18.58 m ²) | 18 |
| UDM-40 | .40" (10 mm) | 39" x 40' (99 cm x 12.2 m) 130 sf (12.08 m ²) | 18 |

Tower Tech²™ Gun-Grade Elastomeric Sealant

Reliable caulking of butt joints, intersections, ends and corners in projects that use Plastic Components' PVC accessories.

Forms a flexible, airtight and water-resistant seal against moisture. Superior adhesion and flexibility. 800% elongation. Non-yellowing white. No 'shiners' or paint discoloration.

| TOWER TECH²™ | |
|--------------------------------|--|
| PC-TS00215 | 12 tubes/box 10.1 oz per tube (299 mL) |



PLASTIC PC™
COMPONENTS inc.



Manufacturers of PVC Accessories for Stucco/Plaster, CI/EIFS, DEFS & Drywall

9051 NW 97 Terrace • Miami, Florida 33178

305/885-0561 • FAX 305/887-2452

800/327-7077

www.plasticcomponents.com • orders@plasticcomponents.com

STUCCO_1123

©2023 Plastic Components, Inc.