


CI/EIFS/Hard Coat

Section: 07240

CB EIFS Casing Bead

| Product Number | *Dimension A | Pieces Per Box |
|-----------------|----------------|----------------|
| CB-50-16 | 1/2" (13 mm) | 60 |
| CB-58-16 | 5/8" (16 mm) | 60 |
| CB-75-16 | 3/4" (19 mm) | 40 |
| CB-1-16 | 1" (25 mm) | 40 |
| CB-15-16 | 1-1/2" (38 mm) | 40 |
| CB-2-16 | 2" (51 mm) | 30 |

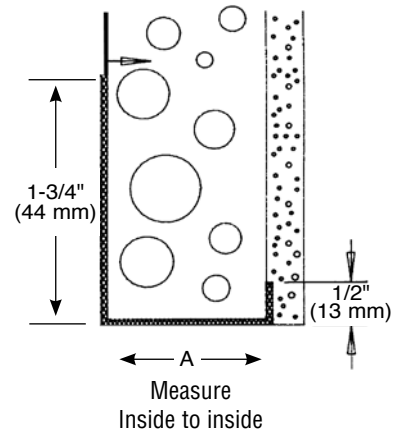

Add suffix "WP" to order with weep holes.
 Example: CBWP-15-16 – 10' (3 m) Lengths
 *Dimension "A"– measure inside to inside

Application:

Acts as a casing bead for the EPS foam board. Can be used around windows and doors. Provides a clean straight line. PVC surface allows caulking to adhere. Flange perforations allow ground coat to bond with the EPS foam board. Excellent paint adhesion.

Specification:

Casing Bead will be Plastic Components, Inc. #_____. All exterior accessories shall meet ASTM standards D1784, C1063, C1861 and D4216, shall be third party tested and Canadian Code compliant. They shall be used where specified by the design authority and installed per industry standards.



PLASTIC PC™
COMPONENTS inc.

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

800.327.7077 ■ Fax 305.887.2452
www.plasticcomponents.com