

Direct Applied Finishes

Section: 07240

STARTER TRAC® Drip Edge

Product Number	Dimensions/Descriptions	Dim. A	Pieces Per Box
STDE-50	STARTER TRAC with drip edge. Striations on front return, and perforations ensure positive physical bond of the base coat to the foam board. Extra wide 3" (76 mm) nailing flange. Base shelf has weep holes 3" (76 mm) o.c. to allow water to migrate from the system.	1/2" (13 mm)	35
STDE-58	STARTER TRAC with drip edge. Striations on front return, and perforations ensure positive physical bond of the base coat to the foam board. Extra wide 3" (76 mm) nailing flange. Base shelf has weep holes 3" (76 mm) o.c. to allow water to migrate from the system.	5/8" (16 mm)	35


10' (3 m) Lengths

Application:

Can be used as a STARTER TRAC® at the base of a wall or an EIFS Casing Bead around window and door openings. Face return flange is 1" (25 mm) with striations which provide a strong physical bond for the base coat and perforations for bonding the base to the substrate. Available with weep holes. Ideal for use where finished edge is exposed. 3" (76 mm) wide nailing flange also has striations for extra bonding.

Specification:

STARTER TRAC® Drip Edge will be Plastic Components, Inc. #_____. All exterior accessories shall meet ASTM standards D1784, C1063, C1861 and D4216, shall be third party tested and Canadian Code compliant. They shall be used where specified by the design authority and installed per industry standards.

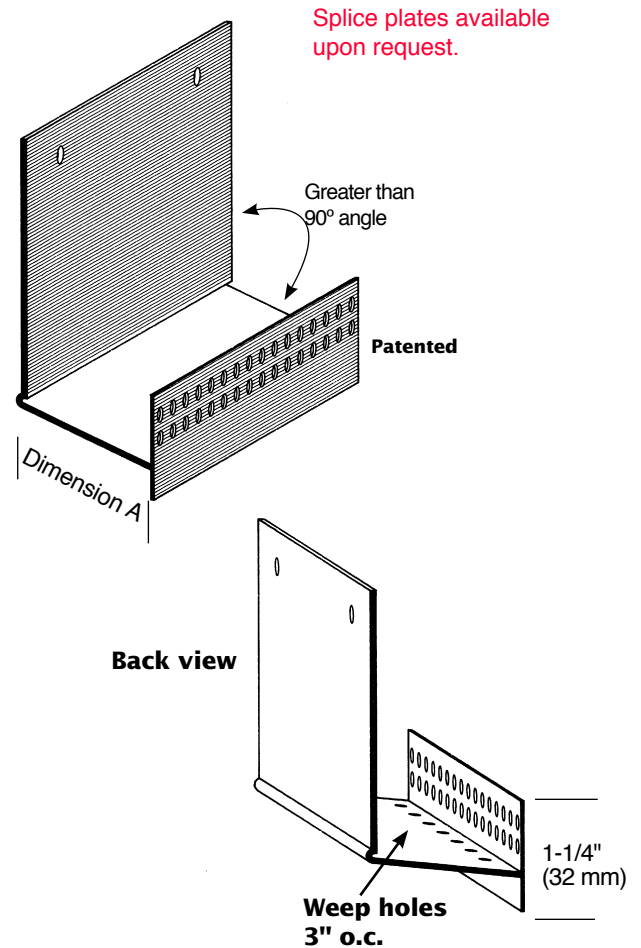

PLASTIC PCTM
COMPONENTS inc.

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

800.327.7077 ■ Fax 305.887.2452
www.plasticcomponents.com