

Color Trims for Stone Veneer



Plastic Components offers **WHITE, GRAY, TAN** and **DARK BROWN** foundation sill screeds, casing beads and drip edges for stone veneer applications.

The colorant for each color is molded into the trim so there's no chipping or loss of color. Our stone veneer trims come in 10 ft (3 m) lengths and conform to ASTM standards D1784, C1063 and D4216.

NEW!




DARK BROWN

Foundation Weep Screeds


Foundation Weep Screeds

Foundation weep screeds install at the plate line or stem wall to provide a stop for stone veneer, allowing moisture to migrate down and away from the wall.

Product Number	Description FHA Weep Screeds	Ground	Pieces in Box
632-50	White	1/2" (13 mm)	35
632-58	weep screed with	5/8" (16 mm)	35
632-75	3-1/2" (89 mm)	3/4" (19 mm)	35
632-78	flange	7/8" (22 mm)	30
632-100	for framing applications	1" (25 mm)	25
632-50TAN	Tan	1/2" (13 mm)	35
632-58TAN	weep screed with	5/8" (16 mm)	35
632-75TAN	3-1/2" (89 mm)	3/4" (19 mm)	35
632-78TAN	flange	7/8" (22 mm)	30
632-100TAN	for framing applications	1" (25 mm)	25
632-50GRAY	Gray	1/2" (13 mm)	35
632-58GRAY	weep screed with	5/8" (16 mm)	35
632-75GRAY	3-1/2" (89 mm)	3/4" (19 mm)	35
632-78GRAY	flange	7/8" (22 mm)	30
632-100GRAY	for framing applications	1" (25 mm)	25
632-50DB	Dark Brown	1/2" (13 mm)	35
632-58DB	weep screed with	5/8" (16 mm)	35
632-75DB	3-1/2" (89 mm)	3/4" (19 mm)	35
632-78DB	flange	7/8" (22 mm)	30
632-100DB	for framing applications	1" (25 mm)	25

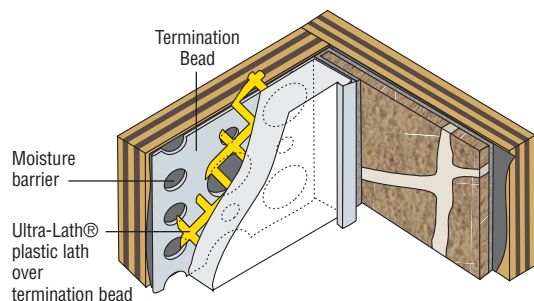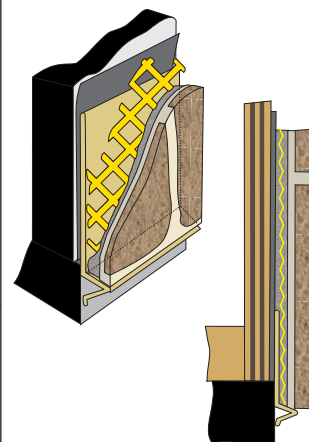

Product Number	Description Color Termination Bead	Ground	Pieces in Box
1050	White	1/2" (13 mm)	75
1058	with 1-1/4" (32 mm)	5/8" (16 mm)	75
1075	perforated flange	3/4" (19 mm)	75
1078		7/8" (22 mm)	75
1100		1" (25 mm)	50
1050TAN	Tan	1/2" (13 mm)	75
1058TAN	with 1-1/4" (32 mm)	5/8" (16 mm)	75
1075TAN	perforated flange	3/4" (19 mm)	75
1078TAN		7/8" (22 mm)	75
1100TAN		1" (25 mm)	50
1050GRAY	Gray	1/2" (13 mm)	75
1058GRAY	with 1-1/4" (32 mm)	5/8" (16 mm)	75
1075GRAY	perforated flange	3/4" (19 mm)	75
1078GRAY		7/8" (22 mm)	75
1100GRAY		1" (25 mm)	50
1050DB	Dark Brown	1/2" (13 mm)	75
1058DB	with 1-1/4" (32 mm)	5/8" (16 mm)	75
1075DB	perforated flange	3/4" (19 mm)	75
1078DB		7/8" (22 mm)	75
1100DB		1" (25 mm)	50




Termination Beads

Colored termination beads form a finished edge between stone veneer and other materials such as vinyl or cementitious siding, stucco, etc.

Add suffix "WP" to order with weep holes. Example: 1050TANWP

Color Trims for Stone Veneer

PLASTIC *PC*
COMPONENTS*inc.*

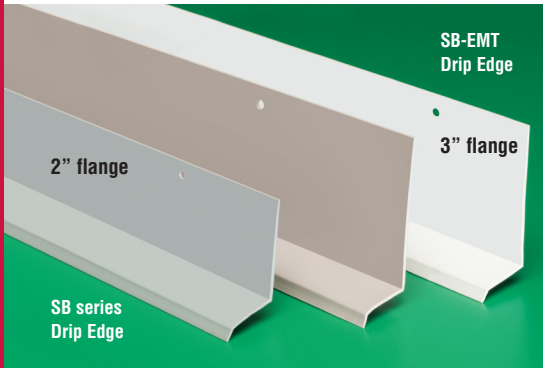

Over Window/Door Drip Edges

Our drip edges are *the PVC trims* to choose for extreme moisture conditions. Designed for use over window or door openings, their sloped front edges move moisture out and away from the wall assembly.

SB series • 2" back flange

Product Number	Description Drip Edge	Board Size	Pieces in Box
SB-50	White Drip Edge with 2" (51 mm) back flange	1/2" (13 mm)	100
SB-58		5/8" (16 mm)	100
SB-75		3/4" (19 mm)	100
SB-1		1" (25 mm)	75
SB-15		1-1/2" (38 mm)	60
SB-2		2" (51 mm)	50
SB-3		3" (76 mm)	30
SB-4		4" (102 mm)	25
SB-50TAN	Tan Drip Edge with 2" (51 mm) back flange	1/2" (13 mm)	100
SB-58TAN		5/8" (16 mm)	100
SB-75TAN		3/4" (19 mm)	100
SB-1TAN		1" (25 mm)	75
SB-15TAN		1-1/2" (38 mm)	60
SB-2TAN		2" (51 mm)	50
SB-3TAN		3" (76 mm)	30
SB-4TAN		4" (102 mm)	25
SB-50GRAY	Gray Drip Edge with 2" (51 mm) back flange	1/2" (13 mm)	100
SB-58GRAY		5/8" (16 mm)	100
SB-75GRAY		3/4" (19 mm)	100
SB-1GRAY		1" (25 mm)	75
SB-15GRAY		1-1/2" (38 mm)	60
SB-2GRAY		2" (51 mm)	50
SB-3GRAY		3" (76 mm)	30
SB-4GRAY		4" (102 mm)	25

White

Tan

Gray

**Both available
in Dark Brown**

SB-EMT series • 3" back flange

Product Number	Description Drip Edge	Ground	Pieces in Box
SB-EMT75	White Drip Edge with 3" (76 mm) back flange	3/4" (19 mm)	30
SB-EMT1		1" (25 mm)	30
SB-EMT15		1-1/2" (38 mm)	30
SB-EMT2		2" (51 mm)	30
SB-EMT75TAN	Tan Drip Edge with 3" (76 mm) back flange	3/4" (19 mm)	30
SB-EMT1TAN		1" (25 mm)	30
SB-EMT15TAN		1-1/2" (38 mm)	30
SB-EMT2TAN		2" (51 mm)	30
SB-EMT75GRAY	Gray Drip Edge with 3" (76 mm) back flange	3/4" (19 mm)	30
SB-EMT1GRAY		1" (25 mm)	30
SB-EMT15GRAY		1-1/2" (38 mm)	30
SB-EMT2GRAY		2" (51 mm)	30

White

Tan

Gray

Permanent, Molded-in Color – NO Peeling, Chipping or Color Loss • Eliminate painting. Get a rustproof job that saves time & money!

Note All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant such as Plastic Components' Ultra-Tech™ (PC-ULTW).

Distributed by